

R 806



Technical Report

R 806




Sponsored by

NAVAL FACILITIES ENGINEERING COMMAND

April 1974

CIVIL ENGINEERING LABORATORY
NAVAL CONSTRUCTION BATTALION CENTER
Port Hueneme, California 93043

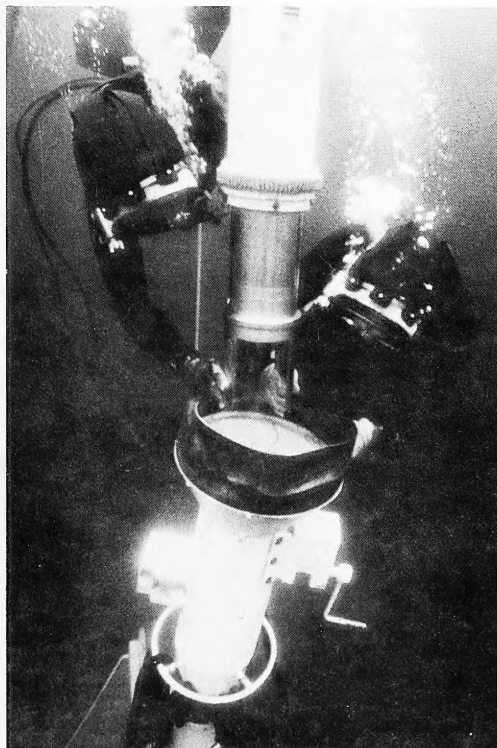

HIGH-POWER
ELECTROMECHANICAL
CABLE CONNECTORS
FOR DEEP OCEAN
APPLICATIONS

By

J. F. McCartney

J. V. Wilson

Approved for public release; distribution unlimited.

TA
417
IN3
no. R 806



UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER TR-806	2. GOVT ACCESSION NO.	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) HIGH-POWER ELECTROMECHANICAL CABLE CONNECTORS FOR DEEP OCEAN APPLICATIONS		5. TYPE OF REPORT & PERIOD COVERED Final
7. AUTHOR(s) J. F. McCartney and J. V. Wilson		6. PERFORMING ORG. REPORT NUMBER
9. PERFORMING ORGANIZATION NAME AND ADDRESS CIVIL ENGINEERING LABORATORY Naval Construction Battalion Center Port Hueneme, California 93043		8. CONTRACT OR GRANT NUMBER(s)
11. CONTROLLING OFFICE NAME AND ADDRESS Naval Facilities Engineering Command Alexandria, VA 22332		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS 3.1540-1
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)		12. REPORT DATE April 1974
		13. NUMBER OF PAGES
		15. SECURITY CLASS. (of this report) Unclassified
		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE
16. DISTRIBUTION STATEMENT (of this Report) Approved for public release; distribution unlimited.		
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)		
18. SUPPLEMENTARY NOTES		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) Cable connectors, underwater connectors, electromechanical connectors, underwater construction, diver operations, high voltage systems, high power systems, manipulator tasks, submersible operations, deep-ocean technology.		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) In support of Navy underwater construction requirements, the Naval Civil Engineering Laboratory has developed prototype high-power electromechanical connectors for use with deep-ocean cable systems and structures. There are two basic connector configurations: one for mating underwater (wet) and one for mating in air (dry). Both are designed for 360 kw, 60 Hertz, 4,160/2,400 VAC power at depths to 6,000 feet, with a mechanical breaking		

continued

DD FORM 1 JAN 73 1473 EDITION OF 1 NOV 65 IS OBSOLETE

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

MBL/WHOI



0 0301 0040397 8

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE(When Data Entered)

20. strength of 50,000 pounds. The wet connector is capable of repeated underwater mating by divers, remotely operated actuators, or submersibles with manipulators. Increased performance in depth, strength, or power would require a simple extension of the design, although any significant increase in transmission voltage levels would require further development. These connectors were evaluated in a series of pressure-vessel and open-sea tests to depths of 6,000 feet. The final configuration performed with no electrical or mechanical degradation after 33 matings at depth. Sustained immersion and power tests for one year at 600 feet and in the tidal zone confirmed the endurance of the designs. This development is the first demonstration of a capability for underwater mating of major electrical/mechanical components of sea-floor structures.

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE(When Data Entered)

CONTENTS

	page
INTRODUCTION	1
CONCEPT FORMULATION	1
Cable Concept	1
Dry Connector Concept	3
Wet Connector Concept	3
Fabrication and Delivery	3
TESTS OF EXPERIMENTAL CONNECTORS	6
Experimental Dry Connector	6
Experimental Wet Connector	6
PROTOTYPE DEVELOPMENT	9
Prototype Dry Connector	9
Prototype Wet Connector	10
SUMMARY	21
CONCLUSIONS	23
RECOMMENDATIONS	23
ACKNOWLEDGMENTS	23
REFERENCES	23
APPENDIX—Alternate Wet Connector Concepts	25

INTRODUCTION

This program supports the Navy's requirement for the development and operation of seafloor installations. It is part of the Deep Ocean Technology Program and was sponsored by the Naval Facilities Engineering Command. Electrical energy for these installations, at power levels from a few kilowatts to several hundred kilowatts, can best be provided from shore-based or surface-tendered sources [1]. Typical undersea installations utilizing such power supplies are illustrated in Figures 1 and 2. They include such components as bottom-laid cable, buoy systems, fixed seafloor structures, underwater work vehicles, diving stations, and tensioned arrays for scientific observations. As the complexity of these structures increases, the techniques of modular construction become more important and the ability to isolate or replace sections without recovering an entire structure becomes essential. The flexibility afforded by appropriately located connections for both installation and maintenance is a prime factor in obtaining efficient operation, optimum construction methods, and long life with minimum downtime.

A serious limitation in undersea operations prior to the developments reported here was that undersea cable connectors were not available for this range of power and strength applications. This lack of suitable connectors severely complicated structure and equipment installation and made maintenance both costly and difficult.

The development effort described in this report concentrated on high-power, high-strength connectors and was coordinated with related low-power connector programs at NAVSHIPS [2].

The specific goal was the development of a high-power electromechanical connector system capable of being mated either underwater (wet) or in air (dry). The desired performance of the cable-connector system was as follows:

1. 360 kw, 60 Hertz, three-phase, AC electric power, at 4,160/2,400 volts, 50 amperes per phase.

2. Breaking strength of 50,000 pounds with a working load of 14,000 pounds.

3. Operation over the entire depth range from 0 to 6,000 feet in the open ocean.

4. Repeated wet-mating capability by divers, or remote operation from submersibles.

5. Design life of 5 years or 500 operational matings.

The initial effort involved a review of existing technology related to undersea connectors to establish current problems and possible design approaches. A conceptual design was formulated for each of two approaches, air and underwater (dry and wet) make/break. Following laboratory tests of components, an experimental model of each configuration was fabricated. A series of pressure-vessel and sea tests was followed by development of second-generation (prototype) connectors.


CONCEPT FORMULATION

In December 1968 a contract was awarded to Southwest Research Institute (SWRI), San Antonio, Texas, for design, fabrication and laboratory tests of an experimental high-power electrical connector system [3]. Conceptual designs were required for a cable, a dry connector, and a wet connector. Both the wet and the dry connectors were to include pressure resistant penetrator pins in their internal construction so that the connectors might be adapted to serve as hull penetrators.


Cable Concept

The concept initially selected for the cable included four quad-configured No. 6 conductors which were insulated, shielded, and cabled around jute filler. Around the polyethylene inner jacket were 48 round steel armor wires, and there was a

(a) General cable connections.

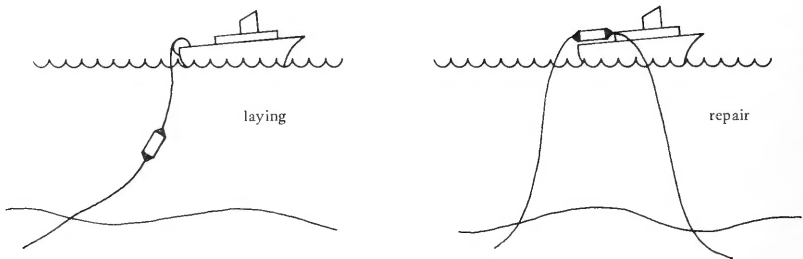

(b) Load bearing termination/penetrations.

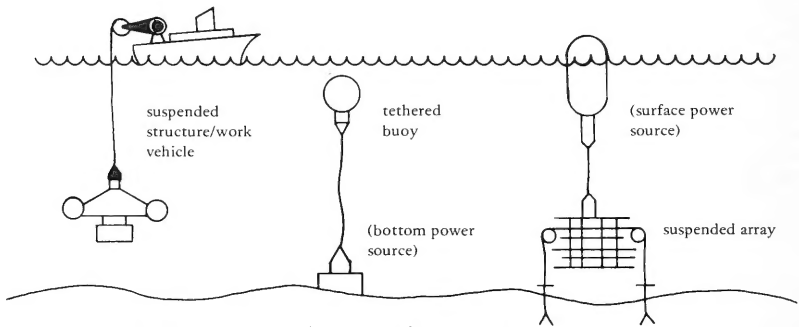

(c) Installed links between major structural components.

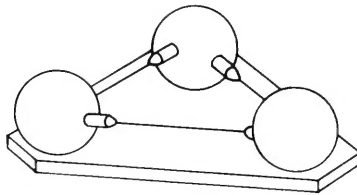


Figure 1. Undersea installations utilizing dry/wet connectors.

polyethylene outer jacket to protect the armor from abrasion and corrosion.

The cable as delivered was different from the initial concept because of procurement problems. The conductor configuration was a triad with three separate neutral conductors for better structural and electrical balance. The cable armor was stranded wires rather than solid. The inner jacket was polyurethane (0.050 inch) and the outer polyethylene jacket was 0.160 inch thick. The cable was not waterblocked, had no shielding, and had no bedding for the armor. As delivered, it weighed 2.14 lb/ft in air (1.07 lb/ft in water) and was very stiff. Although the basic configuration of the delivered cable was satisfactory, the absence of the many refinements in shielding, water-blocking, jacket thickness and armor configuration resulted in only marginal cable performance during later system tests.

Dry Connector Concept

The dry connector concept (Figure 3) involved a stainless steel cylindrical body with one internal main bulkhead near each mating end. Fused-glass penetrator pins through this bulkhead extended back into the body toward the cable termination area and forward into an oil-filled, pressure-compensated chamber which was formed when the two connector halves were mated. The pins in the oil-filled chamber mated with an interference fit. The pins were solder-spliced to their respective phase leads, shielded with stainless steel sleeves, and completely potted in polyurethane. This potting included the entire interior of the connector body. The cable armor was terminated by flaring it and clamping it between two flat compression rings.

Wet Connector Concept

The wet connector concept (Figure 4) utilized the same urethane-potted cable termination and penetrator pin techniques as the dry connector. The design differences were primarily in the area of the mating ends of the penetrator pins.

The male half was fairly simple and had no moving parts. The penetrator pins simply extended out from the face of the connector about four inches with a ring contact about halfway back along their length.

The female half was much more complex. Each of the penetrator pins had an offset sleeve contact on the mating end and was completely potted in polyurethane, except for a hole from the front of the connector through the urethane to the sleeve contact. This hole was filled with a sliding dummy piston made of glass-filled Teflon. This piston was double O-ring sealed near the outer end and the piston was spring loaded and pressure compensated via a small oil-filled chamber behind it. The piston was to exclude seawater from the interior when the connectors were unmated.


During mating the two halves were held in alignment by two large projecting surfaces from the male half which acted as a guide cradle. The two halves were pulled together by a large single-throw lever linkage and as the male pins entered the female cavities they displaced the dummy pistons. The O-rings were intended to wipe the seawater from the male pins.

Fabrication and Delivery


Considerable difficulty was experienced in the manufacture of the fused-glass penetrator pins, in producing void-free massive urethane pots, and in achieving reliable compensator designs. The design was amended to include a cable strain relief after the first dry connector tested failed at 2,300 feet from seawater intrusion near a bend in the cable termination. Further problems were encountered in attempts to disassemble the urethane-potted cable termination and pin splices. As the main body was being unscrewed from the base the urethane transferred enough stress to the penetrator pins to shear off three of the four pins. The remaining urethane required three weeks to dissolve. There is no way to easily disassemble a large urethane pot of this type without seriously damaging the rest of the connector components. This poor reparability proved to be a constant source of aggravation during the test program.

Six sets of hardware were fabricated (three dry and three wet). Two sets were supplied with short sections of cable attached (20 to 60 feet) and the remaining sets were used to assemble two 600-foot cable sections for use in loop power tests.

(a) Shore supply to bottom structures (for both installation and maintenance).

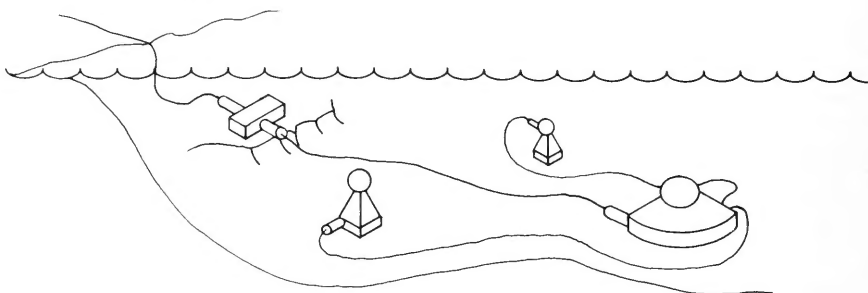

(b) Surface supply to bottom structures (intermittent or continuous).

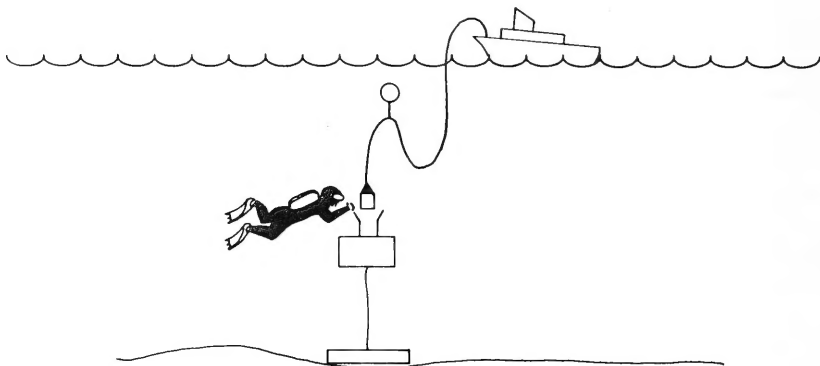

(c) Component assembly underwater/add-on features.

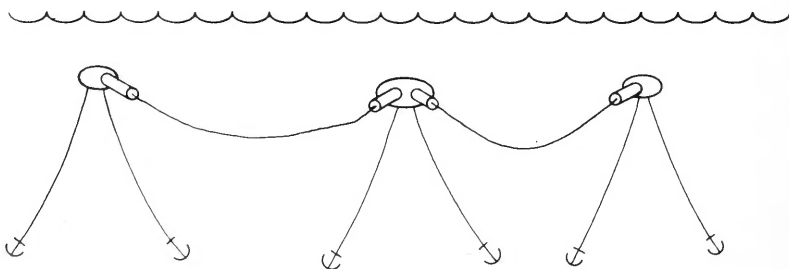


Figure 2. Undersea installations utilizing wet connectors.

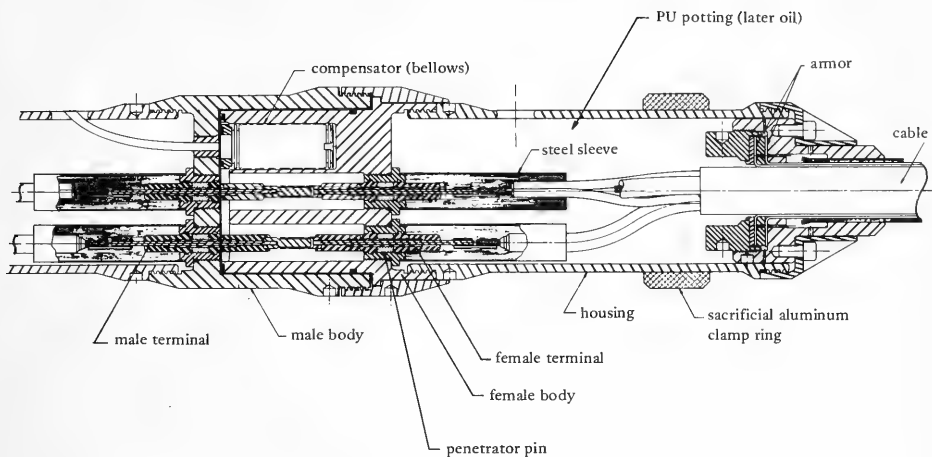


Figure 3. Experimental dry connector schematic.

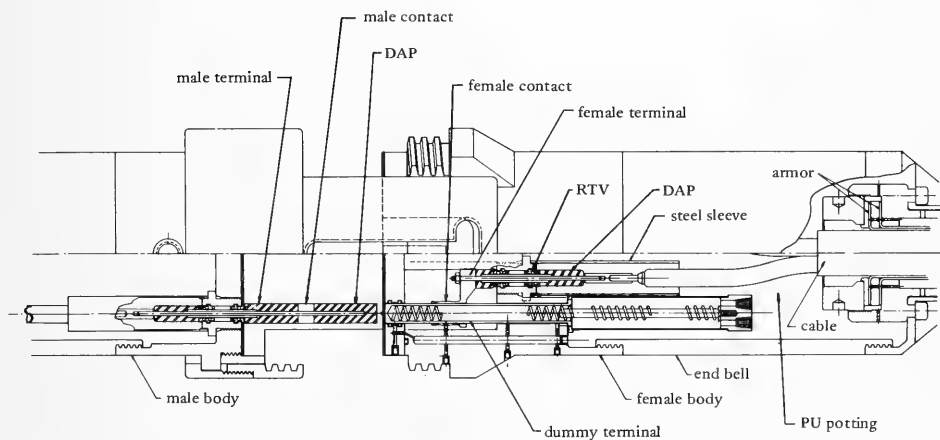


Figure 4. Experimental wet connector schematic.

TESTS OF EXPERIMENTAL CONNECTORS

Because the dry-connector concept was mechanically much simpler than the wet, the initial tests of the dry connector moved directly to sea trials, while the wet connector mating functions were being more closely studied under laboratory conditions.

Experimental Dry Connector

The details of the NCEL* test and evaluation of the experimental hardware were reported in Reference 4 and are briefly reviewed here. A cross section of the experimental model is shown in Figure 3.

In preparation for the NCEL SEACON-I experiment [5] the experimental dry connectors were tested at sea three times. In the first test the dry connector failed (shorted) at 2,300 feet. In the next two tests at 600 feet the dry connector performed successfully. One dry connector was then installed on the SEACON [5] structure and emplaced with the structure at a depth of 600 feet in the Santa Barbara Channel for one year. During this test the connector was used to power the structure at full voltage every two to three months, and, upon recovery, the connector showed no sign of electrical or mechanical deterioration.

After repairing the damage from the 2,300-foot test and modifying the strain reliefs, the dry connector was again taken to sea. During this test the connector failed (low insulation resistance readings) at 4,500 feet. Inspection revealed that the connector seals had failed and the interior was flooded with seawater. Review of the connector construction revealed that the compensator volume was too small so that the compensator would fail to function at between 2,000 and 3,000 feet even if filling was perfect and there was no trapped air in the system. Tests with an auxiliary compensator in the pressure vessel showed that the oil contamination problem was correctable, but the cable termination area (potted in polyurethane) still leaked and shorted out. This was attributed to the fact that urethane experiences a compressive set under pressure and does not instantaneously return to shape as pressure is released. This

causes water to be literally pumped in around the conductors and penetrator pins as pressure is cycled.

A set of dry connectors was also assembled and left under full voltage at shallow depth in the tidal zone of Port Hueneme harbor for five months. This test was completely successful and showed that long-term immersion and power had no degrading effect on the connector performance.

A mechanical test of the cable termination was performed by attempting to lift a 21,000-pound concrete block. The connector lifted the block for about one second and then pulled completely free of the cable. The termination, which had been designed for a 50,000-pound breaking strength, failed completely.

In summary, the experimental dry connectors had the following major deficiencies:

1. The polyurethane potting compound provided no effective waterblock for the cable termination/conductor breakout area and penetrator pin splices.
2. The cable termination design utilizing compression rings on the flared armor was inadequate. (It would also be very difficult to install in the field.)
3. The compensator design was both too small and unnecessarily complicated (positive overpressure was not required).

Experimental Wet Connector

The wet connector and the dry connector have many components in common. The cable strength termination, the conductor waterblock, the penetrator pins and splices, and the basic electrical contacts are nearly identical in both designs (see Figure 4). Therefore, the results of the dry connector tests on termination strength, contact performance and related items were applicable to the appropriate sections of the wet connector; the wet connector test program essentially began where the dry connector tests left off. In addition to the mechanical and electrical performance requirements which must be met by the dry connector, the wet connector has a unique set of problems related to the process of

* On 1 January 1974 redesignated the Civil Engineering Laboratory (CEL) of the Naval Construction Battalion Center, Port Hueneme, California 93043

accomplishing the actual mating operation. This process consists of two basic and nearly independent steps:

1. Rendezvous and alignment. This step involves all the maneuvers required to get one half of the connector into the immediate vicinity of the other half, such as picking up one end of a cable and towing it to a structure to which it is to be mated. This step also includes rotating and translating the connector so that the longitudinal axes of the connectors coincide and the phase pins are correctly matched.

2. Mating. This is the actual mechanical connection of the two halves and the completion of electrical contact, with the attendant contact and insulator wiping action. In the concept used here, the mechanical and electrical operations are accomplished simultaneously, utilizing a linear motion of about 3 inches.

The interface between these two steps is the guide mechanism (Figure 5) utilized both to control the connector during the last few inches of alignment and to effect the actual mating operation. The power and control functions for both operations are provided by either divers, a remotely operated actuator of some sort, or a submersible with manipulator arm.

The test program was designed to first investigate the mating operation under laboratory conditions, then attempt the operation under very simplified rendezvous conditions, and then complete a more complicated rendezvous and mating in the open ocean on an operational structure.

Mating Tests. Initial attempts to quantify the performance of the experimental hardware were made in a shallow tank of seawater at one atmosphere pressure (just below the surface). In general, the phase-to-ground resistance of the connectors degraded with repeated mating. Examination of the oil in the female connector indicated that seawater did intrude and that dirt and O-ring particles were also present. Inspection of the O-rings revealed that they had small spots sliced or pinched off them, as opposed to being abraded from friction. Both the O-ring damage and the water leakage were due primarily to the fact that the square edges of the male pins were easily chipped in trying to start them into the female connector. The roughened edges produced



Figure 5. Wet connectors being mated by divers.

small cavities to pass seawater under the O-rings and possibly to damage them. This is a problem in any pin-wiping system and can be improved by using tougher pin materials, better alignment techniques and more rugged seals.

From these tests it became apparent that although the wet connector system did work at the shallow depths it did so only marginally and that there were many obvious areas requiring considerably improved design if reliability was to be achieved. The next steps were to investigate the effects of increased depth and to begin studying adaptability of the connectors to handling by divers.

Shallow tests by divers with the connectors on a submerged bench indicated that the connectors—when divorced from the forces of attached long cables—could be mated with ease. For open-ocean operations, however, there were two major modifications which had to be made before divers or a submersible could even begin to align and mate the connectors:

1. The connectors had to be isolated from the forces and attendant motion transmitted through the heavy attached cables, particularly cables to ships at the surface.

2. The connector halves themselves must either be made neutrally buoyant or be affixed to a structure.

Rendezvous and Alignment Tests. The initial sea tests were made in a vertical mode, with the female half attached to a test stand. As shown in Figure 5, a guide cone was attached to the vertical female connector half and equipped with gears to align and then mate the male half to the female. A variable-buoyancy lift bag was used to provide a motion-isolating catenary in the cable from the surface and to make the male connector half nearly neutral in the water. The gear system enabled the divers to rotate the male connector and to crank the halves together while the cone held them in alignment.

The entire system was taken to sea and tested with the female held in a stand which rested on the bottom in 50 feet of water. The divers were able to achieve neutral buoyancy on the male cable and mate the connectors on the first try within 25 minutes of entering the water. The stand for the female was 20 degrees from vertical, 50 feet away from the boat. The male connector had to be rotated a full 180 degrees by the gears to obtain correct phase-to-phase orientation.

The entire system was later taken to the SEACON site for further test and demonstration. The guide cone was attached to the female connector at the SEACON Station S buoy at 50 feet and the male connector was successfully mated underwater by divers, this time in a strong current (0.75 to 1.0 kt). The system functioned electrically, and the SEACON structure was powered through the just-mated wet connector and the dry connector attached to the SEACON structure at 600 feet. The handling techniques for this operation were very successful.

To summarize, the experimental wet connector had the following major deficiencies:

1. The pin-wiping technique used to dry the contacts during mating was unreliable and degraded with only one to three matings.

2. The pressure-compensating system and cable termination had the same inadequacies as the dry connector.

In addition to the major discrepancies listed above, the experimental program revealed a host of minor areas for improvement in both the wet and the dry connectors. Most of these had to do with material selection or design details. A summary of these various problems follows:

1. Materials.

a. The use of 316 stainless steel for the connector housings was acceptable in these relatively short-term tests, but for immersions of several years the known crevice-corrosion properties of stainless steel would make titanium or 90-10 copper-nickel a better choice. In applications requiring minimal mechanical strength the housing even could be made of a plastic.

b. The use of glass-filled Teflon in the dummy pistons of the wet female half was unsatisfactory because of the poor structural properties of the material. Under pressure the rods deformed and stuck in the cylinders, and they scratched easily. DuPont Delrin (a nonpolar plastic) proved superior.

c. The use of diallyl phthalate (DAP), RTV silicone rubber and glass in the penetrator pins was also unsatisfactory. The differing bulk moduli, dielectric constants and dielectric strengths led to tracking along the various interfaces after the very weak bonds along them had been sheared because of differential expansion and contraction under pressure. At high pressure the RTV did not seal the face of the fused-glass pins on the wet side of the male connector. At high voltage there was substantial leakage current along the glass/RTV interface. Penetrator pins and other insulated sections should use the absolute minimum variety of materials.

2. Design Details.

a. The use of a single O-ring seal on the wet connector dummy pistons eventually proved successful, but only after considerable redesign of the faces of the pistons and matching male penetrator pins to eliminate misalignment and to ensure that the piston-pin combination presented an essentially smooth

cylinder to the O-ring seal as mating occurred. The early design had produced severe O-ring damage because of sharp, rough edges at the interface.

b. The bail linkage used for initial mating operations of the experimental wet connector was not adaptable to manipulator operation because manipulator arms cannot in general effect rotations about remote axes. The linkage also did not assist in the basic assembly and alignment of the connector halves.

c. Because the mating guides had to be adapted to the existing experimental connector models, the final assembly was very heavy and bulky. Even after prototype work there was still need for considerable refinement in the mechanical alignment system to provide smoother operation and easier handling.

d. The exposed male penetrator pins were very fragile and required protection during handling.

e. The face of the experimental wet female connector was not protected against fouling or siltation. Provisions for this protection must be included in designs for long-term immersion.

The wet connector mating, and powering of SEACON through the two connector types concluded the test phase of the work on the experimental wet and dry connectors. Effort was next directed to the development and test of the prototypes.

PROTOTYPE DEVELOPMENT

The prototype models represented a major redesign of the connectors and in fact were the result of a different design philosophy than that used on the experimental models. The electrical portions of the experimental models, including such items as the contacts and conductor arrangements, had performed quite well and were unaltered in the prototype design. Most of the problems had occurred in the sections of the connectors designed to prevent the intrusion of seawater. The NCEL prototype philosophy was to design the connectors to operate with some seawater intrusion and to use a simple, evenly balanced pressure compensation, rather than the more elaborate scheme utilizing positive internal

pressurization, multiple seals and extensive urethane potting to totally preclude admission of seawater. The prototype design therefore had these major objectives:

1. Make the internal insulation as self-healing as possible. This implied the use of fluid dielectrics.

2. Make the entire system as completely pressure-balanced as possible. This also implied fluid dielectrics, with minimal internal fluid constrictions.

3. Provide tolerance of some seawater leakage. Under the guidelines of Reference 6 this implied a dielectric which was not miscible with seawater, and a design which provided physical separation of contaminating water from high-voltage leakage paths.

4. Build in reparability. This implied interchangeability of parts, mechanical assembly techniques (such as threads instead of welds) and minimal use of permanently potted components.

Prototype Dry Connector

Modifications. While the experimental long-term immersion test was still in progress, work was completed on a modified or prototype version of the dry connector (see Figure 6). The cable termination was changed to a large Dyna-Grip system from Preformed Line Products, which uses preformed helical rods wrapped around the cable as a gripper or "stopper." These rods are then compressed in a sleeve much as the armor wires would be in more conventional designs. A heat-shrink boot from the AMP Corporation was used to seal the conductor breakout into the interior of the connector. The conductors were then spliced to the salvaged penetrator pins by a solder splice wrapped in insulating tape and covered with a semiconducting heat-shrink tube from Raychem Corporation. The heat-shrink tube provided a linear voltage stress gradient along the surface of the insulation. The existing connector shell was used with the addition of an adapter ring to connect the cable termination to the shell. The joints were O-ring sealed, and the inside of the housing was filled with white mineral oil. A small external bladder was used to pressure-compensate the system.

Tests and Results. The prototype connector half was mated with the female half (original design)

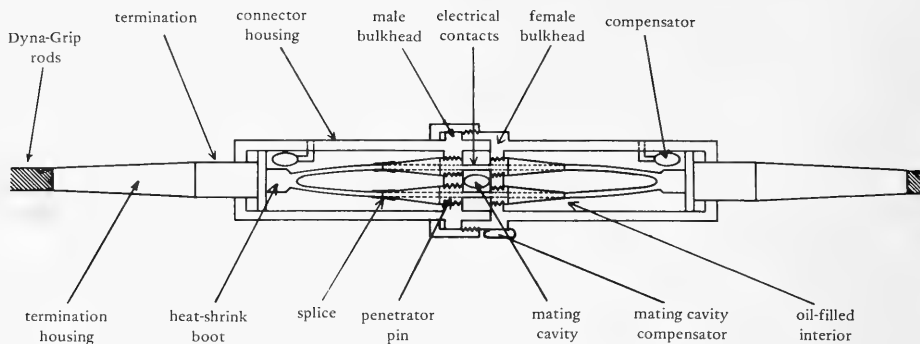


Figure 6. Prototype dry connector schematic.

which had been recently recovered from the long-term immersion test. The assembly was placed in the NCEL 72-inch pressure vessel and pressurized at 100 psi per minute to 3,000 psi (6,750 feet), held for one hour, depressurized, and recycled at the same rate to 500 psi for 15 minutes. There was no electrical degradation of either connector half during the test. Because of the difficulty of adapting seals to the existing housing seams, the prototype housing leaked and the compensating mineral oil was found to contain 15% seawater upon disassembly. Since there was no electrical degradation, the test confirmed the effectiveness of the heat-shrink seals around the individual conductors and splices; the design is genuinely redundant and will tolerate at least partial contamination.

The strength of the cable termination (Dyna-Grip) was tested by mating one prototype half with one experimental half of a dry connector and attempting to lift a 21,000-pound concrete clump as described in the discussion of the experimental test program. Although the experimental termination failed, the Dyna-Grip showed no ill effects at all. Further testing for fatigue, corrosion and other effects will have to await employment in larger-scale systems at sea.

The entire dry connector prototype in its present form can be assembled and attached to a cable end by two men in about six to eight hours. This is a major improvement over the one-to-two days required to install even small connectors utilizing potting techniques. The NCEL prototype design also requires no special tools or controlled conditions for installation.

The contacts and penetrator pins are the same as those in the experimental model (fused glass) which showed no degradation after five months of shallow-submerged continuous operation and one year of submerged (600 feet) intermittent operation. Glass-filled epoxy pins developed later for use in the wet connector should be used for applications requiring less stringent open-face pressures (such as for in-line operation rather than as a structural penetration).

Evaluation. The NCEL high-power electromechanical connector (dry) is now ready for final design to fit whatever specific applications may arise. With the exception of the penetrator pins and cable termination, production of the entire dry connector is well within the capacity of any user with access to a machine shop. Costs may be expected to vary considerably with the desired mechanical strength because of the termination, housing and resultant machining effort. The cost would also increase if fused-glass pins were used. The connector depth rating is exclusively a function of the compensator volume, and the life is principally a function of the choice of housing materials. Performance has been demonstrated to a simulated depth of 6,750 feet and over a sustained immersion of one year at 600 feet.

Prototype Wet Connector

Modifications. A set of experimental wet connectors was disassembled for analysis of failed internal components and for modification as

prototype connectors. The greatest problem encountered in the disassembly was the effort involved in dissolving the polyurethane potting material. After nearly four weeks of dissolving the polyurethane, the internal components were available for inspection.

It was later discovered that the polyurethane potting can be quickly removed by first baking the assembly at 400-500°F for 3 hours. The polyurethane is thermally decomposed to an easily crushed solid that is readily removed. However, this process damages all components that are not metallic.

Analysis of the internal components of the experimental connectors presented the following results:

1. **Dummy Piston.** As shown in Figure 7, the dummy pistons were severely deformed due to cold flow of the glass-filled Teflon material from which they were machined. This deformation accounted for the stiffness of operation of the pistons in the assembled connector. It is believed that this deformation was caused by compression or shrinkage of the surrounding polyurethane material.

2. **Penetration Pins.** Figure 8 shows tracking paths between the high-voltage cable terminal and the threaded fitting that is at ground potential. This is positive evidence that the polyurethane did not always seal to the DAP and other materials that make up these penetrators.

3. **Pressure-Equalizing Pistons (Compensators).** The four pressure-equalizing pistons were displaced by springs that were located on the seawater side of the piston. These springs were severely corroded, and corrosion products contaminated the seawater in the compensator cylinder. The corrosion products and other foreign material that collected in the cylinder caused the pistons to jam.

It was also found that the female contact ring was located too close to the side of the urethane-filled cavity. The spacing was less than 1/8 inch, which was a very marginal thickness for the dielectric strength of urethane. The problem was compounded by the fact that an oil flushing duct was drilled through the housing and urethane directly into the contact area. This provided a trap for contamination

and a very short tracking path for high voltage leakage currents. Previous high voltage pulse tests of the assembled connector had indicated that breakdown did in fact occur at this point.

To correct the deficiencies found during the testing and disassembly of the experimental connector, one wet connector set was extensively modified as a prototype. As shown in Figure 9 the modifications include new and more reliable electrical pins, pin-wiping seals, dummy pistons, pressure-equalizing system, electrical insulation, and a Dyna-Grip termination. The new design can now be quickly assembled or repaired at sea because no potting compound is used.

The modified male pin, female contact assembly, and dummy piston are shown in Figure 10. The male pin contact is gold-plated copper and is insulated with molded high-quality, glass-filled epoxy. The pin is 0.613 inch in diameter and has an overall penetration of 2.375 inches. The convex tip of the copper contact is machined to align with the dummy piston in the female half. The female contact assembly consists of a 0.375-inch copper rod, a crimp type wire terminal and a gold-plated copper female contact (taken from the experimental model), and is insulated with a machined sleeve of acetal material (DuPont Delrin). The female pin insulator is machined to provide proper contact alignment, a hexagonal portion for reliable assembly with a socket wrench and a cylindrical surface that is turned to the same diameter as the cable insulation to aid in taping and insulating the terminal. The dummy piston is a copy of that used in the experimental model except it is made of Delrin and has a concave surface that aligns and nests with the leading edge of the male pin.

Several types of pin-wiping seals were tested during these modifications. The pin-wiping seal shown in Figure 10 is a conventional, automotive-type lip-seal. Several similar seals were tested for pin-wiping performance using the test apparatus shown in Figure 11. The apparatus was submerged in seawater and a male pin was used to depress the dummy piston simulating an underwater connector mating. The mating sequence was repeated 50 or more times for each type of seal. Monitoring of the dielectric strength of the insulating oil was the indication of the relative performance of the seals. In general the single O-ring would reliably allow the

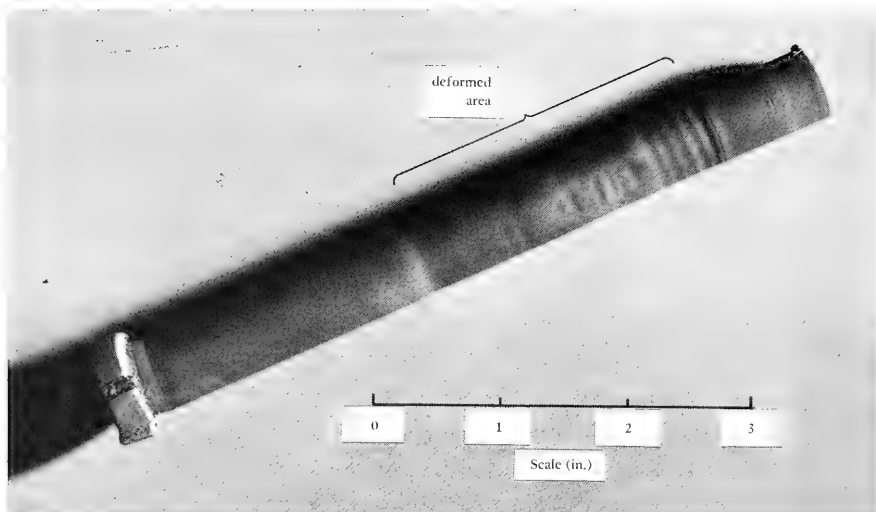


Figure 7. Distorted dummy piston removed from experimental connector.

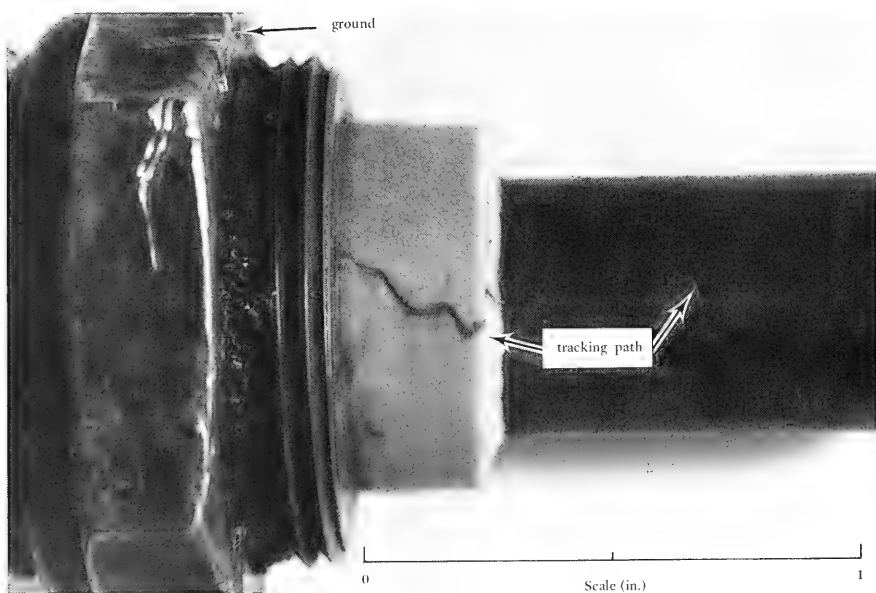


Figure 8. Penetrator pin removed from experimental connector showing electrical tracking path to ground potential.

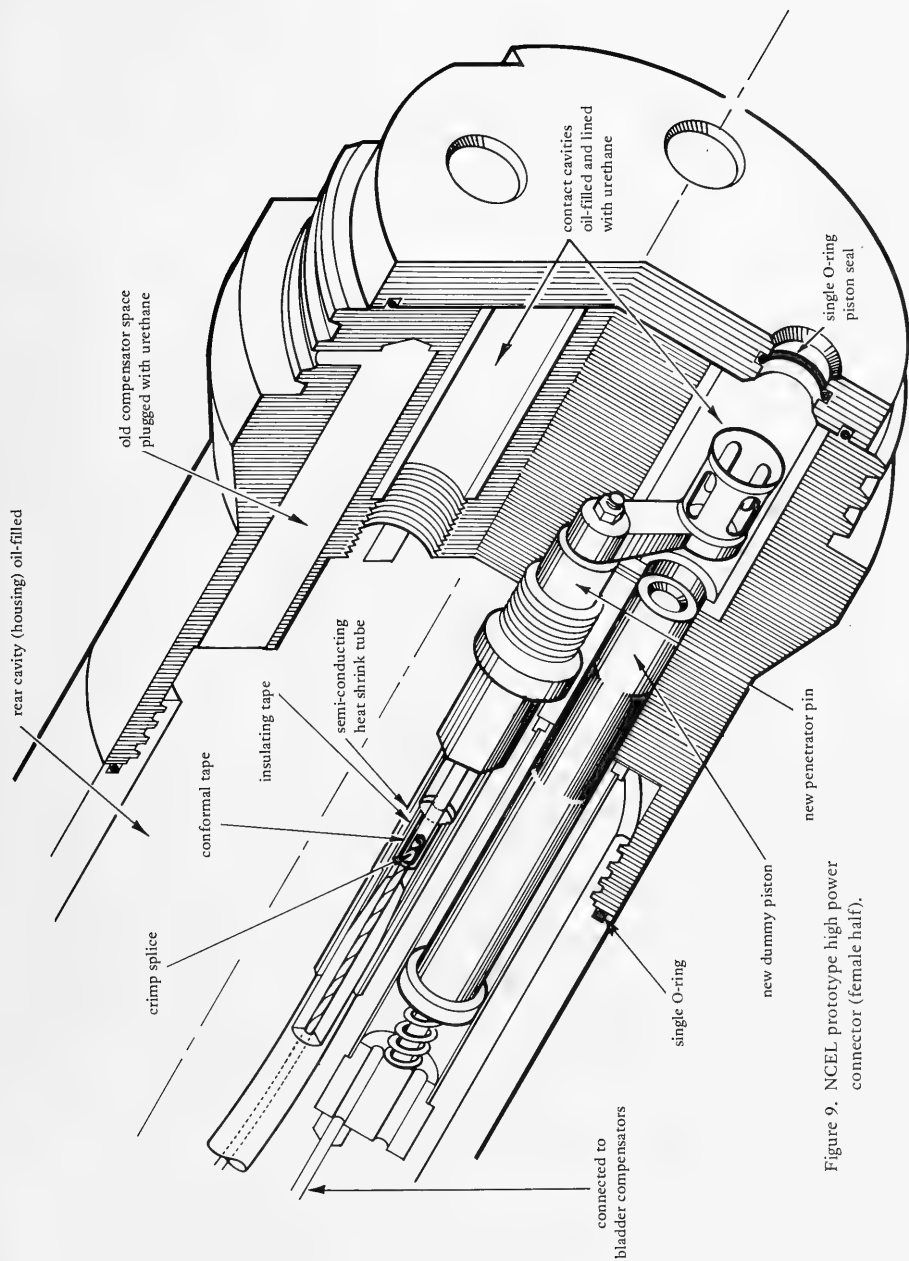


Figure 9. NCEL prototype high power connector (female half).

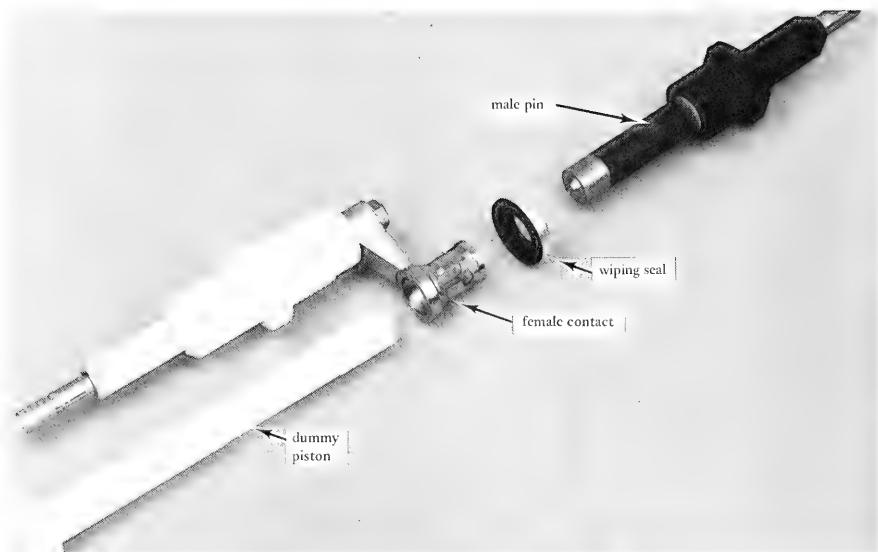


Figure 10. Modified male and female electrical contacts, dummy piston and seal for prototype connector.

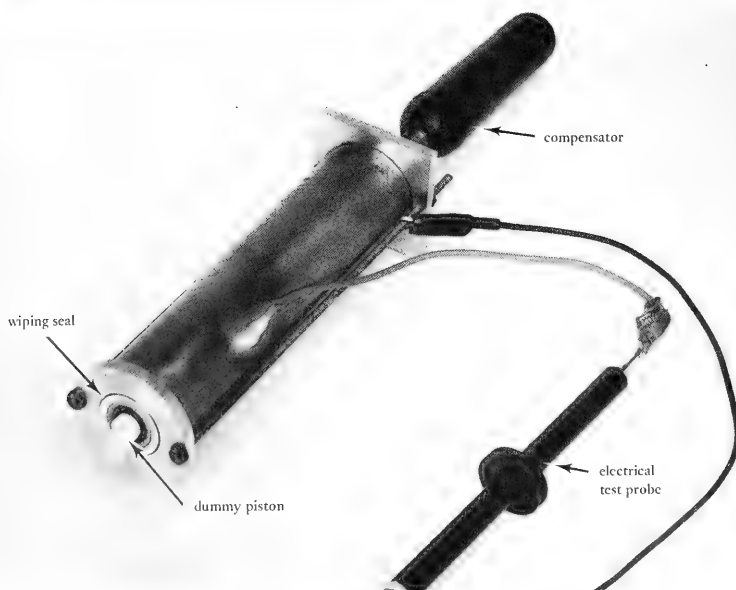


Figure 11. Pin-wiping seal test apparatus.

dummy piston to reveal the female connector and was most effective in wiping the male pin. For these reasons the O-ring seal was used in the final test program.

Figure 12 shows all of the components of the modified wet connectors. Figure 13 shows the male half nearly assembled. A heat-shrinkable boot is used to seal and waterblock the cable to the Dyna-Grip assembly. Two rubber pressure-equalizing bladders provide 2 pints of compensation volume. The stainless steel (Type 316) shell sections are threaded for assembly and sealed with O-rings. The bladders are installed and connected to the seawater vent. At high pressure, seawater inflates the bladders to compensate for volumetric shrinkage (or compression) of the internal fluids and cable materials.

The connector is filled with approximately one gallon of dielectric oil (white mineral oil, Type USP) at an initial pressure of 50 psig to test for leaks. The pressure is bled down to atmospheric, at which the trapped air and excess oil are displaced. The seawater vent is temporarily plugged during the bleed-down to keep the pressure-equalizing bladders fully deflated.

The female half of the connector, as viewed from the front end with the faceplate removed, is shown in Figure 14. The four female contacts are shown with the dummy pistons in place. The oval-shaped contact cavity is lined with about 0.250 inch of polyurethane insulation (PRC No. 1547). If moisture accumulates in the female connector this insulation will isolate the droplets from direct contact with the steel housing. This reduces the amount of leakage current between the contact and the connector body.

Figure 15 shows the female connector sub-assembly rotated with the cable terminals and dummy pistons visible. Four spring retainers and the pressure-equalizing bladders complete the assembly. Polyurethane was used to fill the four cavities originally provided for the pressure-equalizing cylinders.

Figure 16 shows the prototype female connector mostly assembled with the compensators, dummy pistons, spring-retaining faceplate, and Dyna-Grip cable termination in position. The rear body section is later installed and the connector is filled with dielectric oil, as is the male connector. The female connector is purged by holding the connector in a vertical position with the faceplate up, and depressing

the dummy pistons to vent air and oil until clean oil is being passed. A small hand pump is temporarily connected to the connector fill port for this purpose.

Figure 17 shows the completed wet connector. The mated connector is approximately 3 feet long, 8 inches in diameter, and weighs 150 pounds in air and 100 pounds in water. The Dyna-Grips extend approximately 9 feet beyond the connectors.

Test Program. A comprehensive test program was outlined to determine the performance and reliability of the prototype wet connector. The principal new technologies which required testing are given in Table 1 with applicable parameters for the tests. This matrix was the basis for planning and conducting the following tests:

1. Initial high pressure test of seals, compensation system, and high-voltage insulation
2. Power transmission test in shallow water
3. Underwater mating test in shallow water
4. Underwater mating test in high-pressure vessel with high power transmission (120 kw)
5. Undersea mating test at 4,000 feet (remote mating fixture)
6. Remote mating test using deep submersible manipulator

Each of these tests is discussed below.

Initial High Pressure Test. The prototype connector was first tested in the NCEL Deep Ocean Laboratory (DOL) under cyclic pressure (5 cycles) to 4,500 psi at 40°F. A hipot instrument monitored the insulation level of the individual phases at 6,000 VDC. The insulation level remained excellent throughout the test (greater than 10 MΩ). After removing the connectors from the test chamber, the compensation oil was drained from the connectors and no salt water contamination was found. The results of these tests showed excellent performance of the seals, compensation system, and high voltage insulation.

Power Transmission Test. The current-carrying performance of the mated connector was tested initially by connecting all phases in series to a low-voltage high-current transformer. The current was

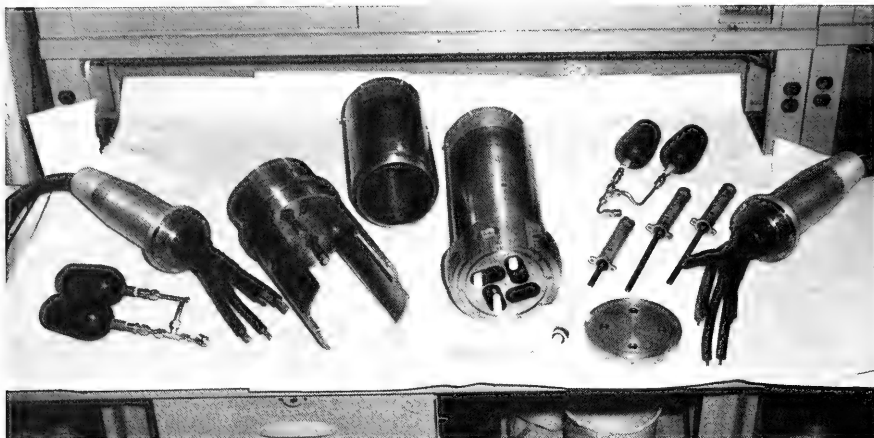


Figure 12. Components of the prototype wet connector.

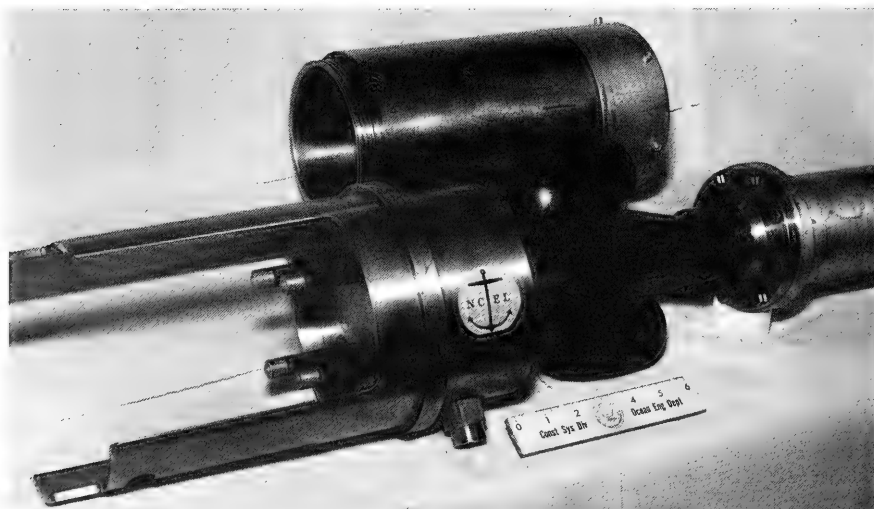


Figure 13. Prototype wet connector (male half).



Figure 14. Female connector subassembly with faceplate removed.

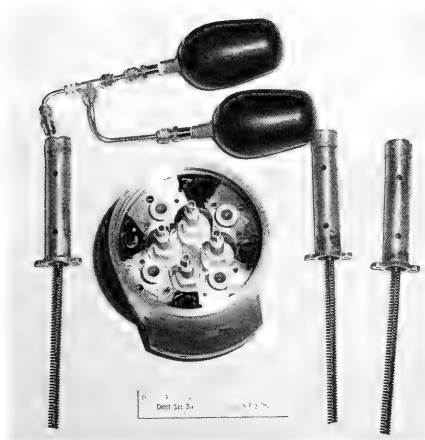


Figure 15. Female connector subassembly (rear view)

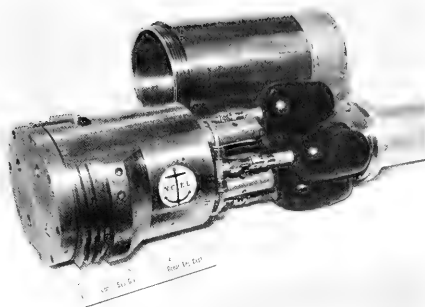


Figure 16. Assembly of female wet connector.



Figure 17. Completed prototype wet connector.

adjusted to 50 amperes and sustained for 7 hours. The voltage drop across the connector and cables increased from 2.9 to 3.0 VAC due to the temperature rise of the cables.

This test was followed by a power transmission test in a dry environment. Connections were made as shown in Figure 18. The connector transmitted 100 kw for about 3 hours at 4,160 VAC.

The connector was then installed in a 10-foot-deep tank of seawater for 2 weeks. Again 100 kw was transmitted for two 4-hour periods, one at the initiation of the test and one at the conclusion. Leakage currents remained less than 3 μ A at 8,000 VDC during the 2-week immersion. The performance of the connectors was again excellent.

Underwater Mating Test. A battery-powered, remote-controlled drive system was fabricated to mate the connector in a series of experiments to determine the performance of the pin-wiping seals and the overall performance as a deep-ocean wet connector. The drive system was designed to activate the alignment and guide cone assembly used earlier during diver-supported mating tests. The first test was performed in about 10 feet of seawater, where the connector was mated five times. The drive system used with the connector was geared to about 10 rpm and the male connector moved about 3 inches in 90 seconds to complete a mating or unmating. The leakage current remained at or below 1 μ A for each phase during these tests.

The connector was moved to the NCEL 72-inch-diameter DOL for mating tests under high-pressure with power transmission. High voltage electrical cables and penetrators were used to provide power transmission through the pressure vessel head to the connector as shown in Figure 19. The pressure vessel was filled with cold seawater (5°C) and pressurized to 3,000 psi. The connector was mated and unmated a total of 16 times and up to 120 kw of power was transmitted at intervals during the 5-day test. Insulation and current-carrying tests made at the conclusion of the experiments showed no degradation of electrical performance from the multiple underwater matings at high pressure.

Undersea Mating Test. The electric actuator was again used to evaluate the electrical performance of the connector during and following multiple

underwater matings, this time under actual at-sea conditions. The arrangement for this test is shown in Figure 20. A high-strength electromechanical cable was used to lower the battery-powered, remote-controlled connector to a depth of 4,000 feet. A high voltage coaxial circuit within the E/M cable was used to monitor the insulation leakage current at 8,000 VDC during the test. Twelve matings were achieved during this test, and again there was no indication of electrical degradation.


It is important to note that at the conclusion of this test a total of 33 underwater matings had been achieved with no degradation of performance. During these tests pressure-compensating dielectric fluid was not replenished and electrical insulation properties did not change. The dielectric fluid was drained from the connector and found to be free of seawater. A trace of gold particles, from the wiping action of the contacts, was found dispersed in the oil. It is believed that the mechanical wear of the contacts would allow several hundred mating cycles without any maintenance. The pin-wiping O-ring seals were removed and inspected under a microscope for wear or "nibbling" and were found in perfect condition, indicating the reliability of this sealing arrangement.

Remote Mating Test Using Deep Submersibles With Manipulators. Many projected applications of the wet connector depend on the ability to make connections in the deep ocean. To determine the feasibility of this approach the alignment device and wet connector set shown in Figure 21 were fabricated and shipped to New London, Connecticut, for undersea tests utilizing the nuclear research submarine NR-1 and its manipulator. The connectors and test stand were taken to sea by the NR-1 and tested in deep water near the Bahama Islands.

The test was successful. NR-1 unmated and then mated the connector utilizing its manipulator. Difficulties were experienced with the lift lines for the test stand and the currents required reorienting the stand three times during the two hours of testing. Although the connector half could be handled successfully there was need for a more positive grip point for the manipulator claw and for more definite color and pattern keys to display connector alignment and relative motion during mating. These handicaps made the alignment and engaging of the connector halves the most time-consuming portion of

Table 1. Matrix of Required Tests

Parameter	Test Requirement by Technology				
	Insulation	Conductors	Seals	Compensator	Mating Devices
Depth					
Shallow ocean	yes	yes	yes	yes	yes
Deep ocean	yes	yes	yes	yes	yes
Power Level					
Low	yes	yes	NA	NA	NA
High	yes	yes	NA	NA	NA
Mating Method					
Diver	NA	NA	NA	NA	yes
Manipulators	NA	NA	NA	NA	yes
Endurance					
Long	yes	yes	yes	yes	NA
Short	yes	yes	yes	yes	NA

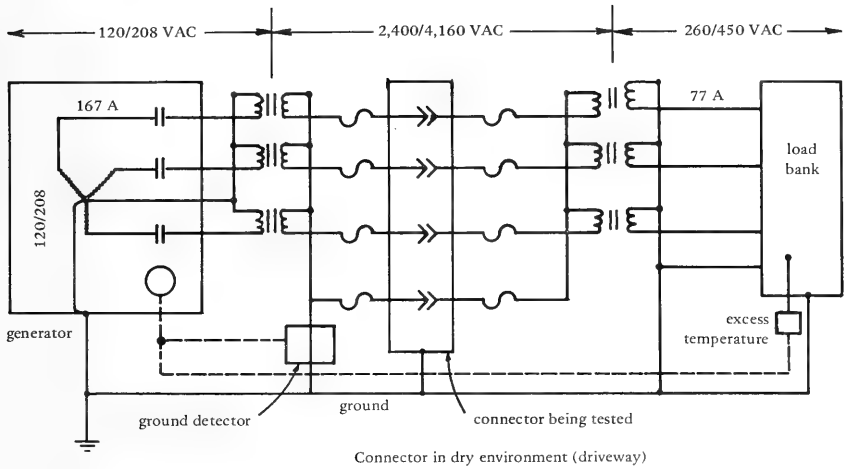

Test terminated due to diesel generator problem

Figure 18. Schematic wiring diagram for power transmission tests.

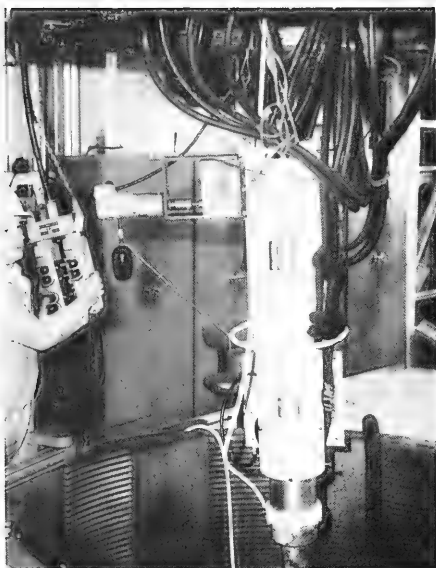


Figure 19. Connector arranged for remote mating and high-power transmission test at high pressure.

the test. It is expected that this problem would be even worse if heavy cables had been attached to the connector halves, so that although this first-ever attempt was successful there is a definite need for further testing of the complete handling and rendezvous problem for complete cable/connector systems. It is interesting to note here that the NR-1 proved an excellent work platform for this operation because of its considerable size, good maneuverability and long bottom-time capability.

SUMMARY

The NCEL connector program began with the SWRI Phase I study to develop a concept for deep-ocean high-power electromechanical connectors in

support of the Navy's needs for underwater construction. After a year of extensive sea and laboratory tests the experimental models were only marginally satisfactory and the basic concepts were reviewed. The use of pins and wiping seals was still considered a sound approach but major changes were required in other parts of the hardware design philosophy, including the use of fluid-filled pressure-compensated components, refinements in pin design and improved material selection.

The experimental dry connector was modified to a prototype configuration and used to test the new termination techniques and the pressure compensating system. The wet connectors were also modified to a prototype design to demonstrate the refined pin wiping system and to develop techniques for mating the connectors at sea by divers and by remote actuators or manipulators. General specifications for these prototype connectors, from which detailed designs for specific applications may be derived, are to be included in Reference 7.

The following specific capabilities were demonstrated with the prototype connectors. Note that the test values are not failure points, but rather the limits to which tests were conducted; the prototype equipment has not been tested to failure in any mode.

- Cable termination strength test to 21,000 pounds (design breaking strength is 50,000 pounds, design working load is 14,000 pounds)
- Sustained power at full voltage for 5 months (shallow water)
- Sustained immersion at 6,000 feet in pressure vessel with full power applied for 2 hours on each of three occasions over 5 days
- Thirty-three underwater matings with no degradation (21 at 6,000 feet in pressure vessel, 12 at 4,000 feet in open ocean)
- Operational mating of wet connector by divers at 50 feet in open ocean and transmission of power through the connected system (SEACON I)
- Sustained immersion in open ocean for one year with intermittent power.



Figure 20. Connector and remote mating equipment used during deep ocean test at 4,000 feet.

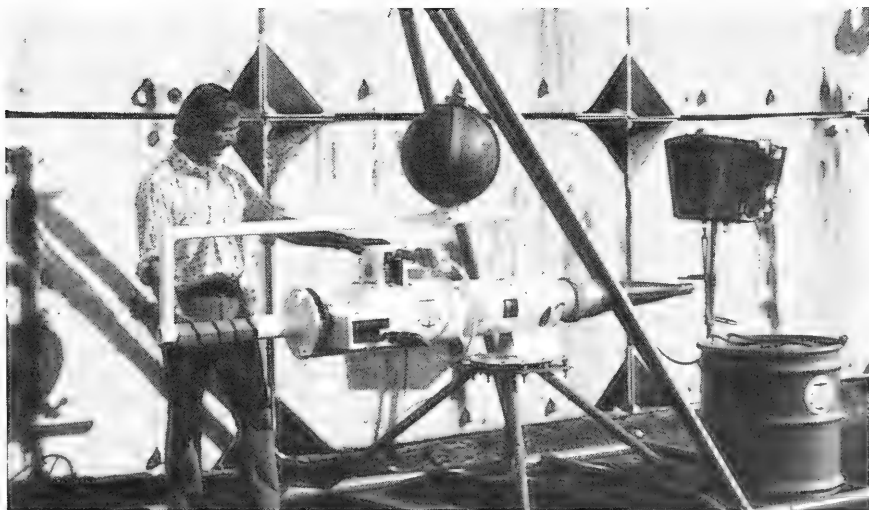


Figure 21. Wet connector with mating system for use in remote mating experiments by submersible manipulators.

CONCLUSIONS

This project has demonstrated that:

1. It is feasible to design, fabricate, and reliably operate deep-ocean cable systems utilizing both wet and dry high-power electromechanical cable connectors.
2. For high-power deep-ocean connectors, a fluid-filled pressure-balanced system is definitely superior to large urethane pots both in operating performance and reparability.
3. The wet mating technique using O-ring seals on pins is effective and is superior to any other existing method for high-power deep-ocean applications.
4. Underwater mating of large electromechanical connectors by divers in the open ocean is feasible.
5. Mating of large connectors by submersible manipulators has been demonstrated. Since deep mating operations are a key link in connector operations, further work is needed in this area.

RECOMMENDATIONS

1. Conduct combined systems tests at depths of 6,000 feet, at 360 kw, incorporating several wet matings at depth over a period of 1 to 5 years. This test should preferably be performed in parallel with some other installed system in order to begin a baseline for operational reliability data.
2. Extend the existing technology to 34.5 kv at several megawatts in preparation for high-power transmission with long undersea cables.
3. Investigate the application of the basic power connector technology to such requirements as high-current umbilical or coaxial connectors.

ACKNOWLEDGMENTS

The authors wish to acknowledge the efforts of Mr. Ed Briggs and the staff of Southwest Research Institute, who designed and built the experimental models. There were also several NCEL personnel who contributed directly to the completion of this

development. Mr. R. N. Cordy was the original project engineer and later guided the effort as Director of the Construction Systems Division. LT Robert Bruce, CEC, USNR was assistant engineer during the procurement and early testing of the experimental hardware. Mr. Lee Tucker assisted during the testing of the prototype and Mr. Thorndyke Roe provided supporting expertise in the field of materials compatibility and chemical processes. Especially important throughout were the contributions of Mr. Fred Potter, project technician during the entire program.

REFERENCES

1. Naval Civil Engineering Laboratory. Contract Report CR 68.004: Conceptual study of electrical power transmission systems to deep ocean installations, by I. M. Waitsman. Groton, Conn., General Dynamics Corp., Electric Boat Div., Aug. 1967. (Contract No. N62399-67-C-0015) (AD 662037)
2. F. B. Small and R. T. Weaver. "Underwater disconnectable connectors," in Preprints of the 7th Annual Conference of the Marine Technology Society, Washington, D.C., Aug. 16-18, 1971, pp. 125-134.
3. Naval Civil Engineering Laboratory. Contract Report CR 72.006: A wet and dry deep submergence electrical power transmission system, Phases I and II, by E. M. Briggs, et. al., San Antonio, Tex., Southwest Research Institute, Nov. 1971. 2 vols. (Contract No. N62399-69-C-0001) (v.1 AD 892356L; v.2 AD 892357L)
4. J. F. McCartney and J. V. Wilson. "High power transmission cables and connectors for deep ocean applications," in Preprints of the 8th Annual Conference of the Marine Technology Society, Washington, D.C., Sept. 11-13, 1972.
5. Naval Civil Engineering Laboratory. Technical Report: Seafloor construction experiment, SEACON I, by T. R. Kretschmer, et. al. Port Hueneme, Calif., 1973 (in publication).

6. Naval Ship Research and Development Center. Annapolis Laboratory Report No. 27-8: Handbook of fluid-filled, depth/pressure-compensating systems for deep ocean applications, by T. H. Mehnert. Annapolis, Maryland, April 1972.
7. General Dynamics Corp., Electric Boat Div. Report No. U-413-68-030: Handbook of vehicle electrical penetrators, connectors and harnesses for deep ocean applications, by R. F. Haworth, et. al. Groton, Conn., July 1971. (Contract No. N00024-68-C-5434)
8. Naval Civil Engineering Laboratory. Final Report: Feasibility study of scaling up the low voltage underwater disconnectable connector for high voltage applications, by W. Michelson, et. al. Syracuse, N.Y., Crouse-Hinds, July 1972. (Contract No. N62399-72-C-0016)

Appendix

ALTERNATE WET CONNECTOR CONCEPTS

In preparation for the prototype wet connector design another review was made of the existing connector techniques. A summary of the various methods for making electrical contact underwater follows:

<u>Method</u>	<u>Manufacturers/Developers</u>
Pin types (utilizing wiping seals)	Naval Civil Engineering Laboratory (NCEL) Mare Island Naval Shipyard (MINSY) Commercial
Diaphragm puncture	Commercial
Grease displacement	Commercial
Split transformer	Commercial
Compression wiping (button contacts)	None

Figure A-1 shows the general appearance and relative size of these other wet connectors.

The Mare Island Naval Shipyard connector [2] is a 440-volt power connector with a successful experimental model already in existence. It was designed specifically for use by divers with submarines and is small and light to handle. It would require fabrication of a mating guide mechanism to be compatible with a manipulator. It is somewhat complex, and is not designed for heavy mechanical loads.

Most commercial pin-wiping power connectors are quite small and inexpensive but operate at power levels far below those required for major structural applications. They require considerable force to mate and are not now adapted for use by manipulators. The materials used are not suitable for direct application to high voltage and degrade unacceptably with extended submergence.

The commercial diaphragm-puncture connector operates at up to 600 volts, has eight contacts, and is very simple. It is between the NCEL and MINSY connectors in size and capacity and is the only right-angle power connector found. It is mated by set-screws. This connector combines many of the features required for structural applications but has not been tested for higher voltages or deep submergence.

One company uses a grease-filled connector for automatic connection of submersible pumps. The connector configuration is different from most in that the contacts are in line rather than in parallel, so that the connectors are insensitive to rotational alignment. The contacts are simply concentric rings spaced along the male pin and female cylinder respectively. This offers a much easier mating arrangement, especially for remote operations. Unfortunately the concept is still experimental and has not been adapted for use in the ocean environment. The exposed grease surface is particularly vulnerable to contamination.

Split-transformer and related electromagnetic coupling techniques are normally not applicable to high power connectors because of the large size and weight of transformers of kilowatt capacity. There are several commercial products which use this concept for coaxial and other signal applications, however, and the extreme simplicity and reliability of the mating operation make this method very attractive for further development.

Analysis of these designs and the experience gained from each of them indicated that the pin-types were best suited to high-voltage, deep-submergence use. The success of the mechanical portions of the Mare Island Naval Shipyard design indicated that their experience would be of value in the development program, so a small contract was awarded to determine the feasibility of scaling up the 440-volt design to the NCEL high-power

electromechanical applications [8]. The study concluded that their mechanism could be adapted to the NCEL requirements, but the time and cost of that approach were greater than the program could support. The decision was made to modify the existing NCEL experimental hardware to approximate the prototype design as closely as possible and to thoroughly exhaust the possibilities of the basic NCEL design before moving to other concepts (if necessary).

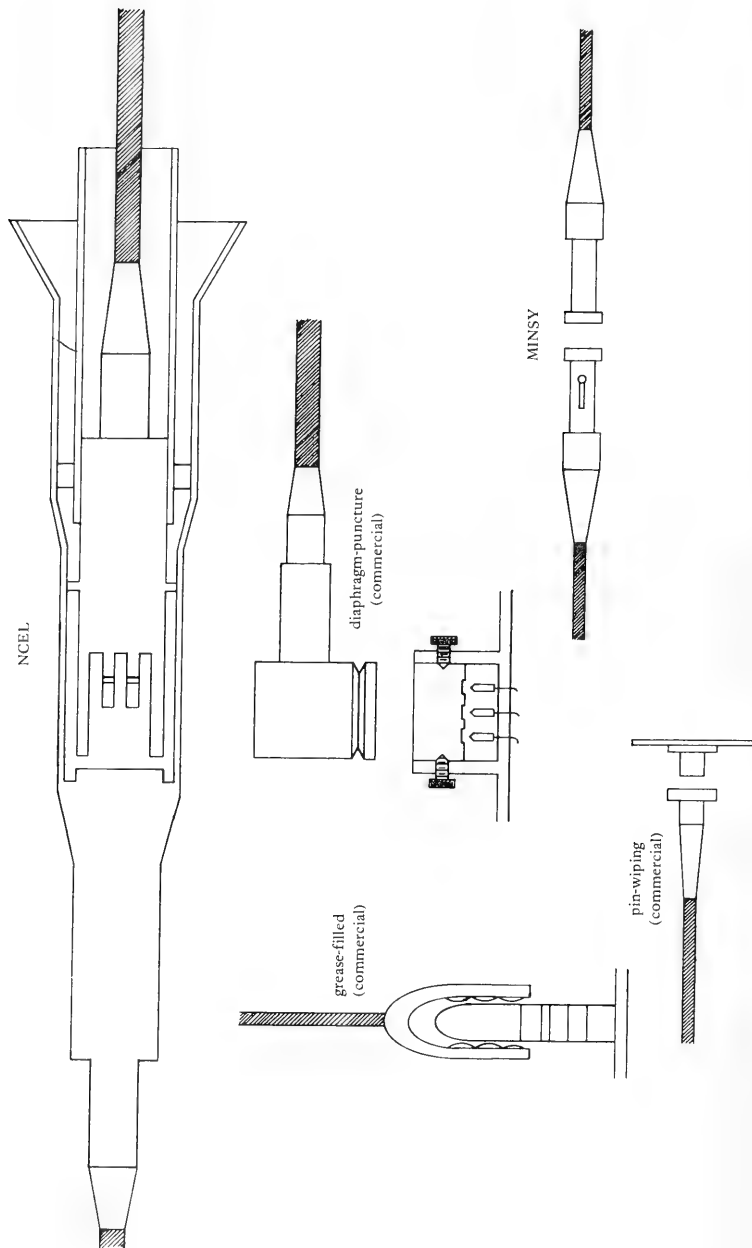


Figure A-1. Other wet connectors.

DISTRIBUTION LIST

SNDL Code	No. of Activities	Total Copies	
—	1	12	Defense Documentation Center
FKAIC	1	10	Naval Facilities Engineering Command
FKN1	6	6	NAVFAC Engineering Field Divisions
FKN5	9	9	Public Works Centers
FA25	1	1	Public Works Center
—	9	9	RDT&E Liaison Officers at NAVFAC Engineering Field Divisions and Construction Battalion Centers
—	215	222	CEL Special Distribution List No. 11 for persons and activities interested in reports on Ocean Engineering
Bernard Willey (Code 385) * Boston Naval Shipyard Boston, MA 02129			Public Works Officer Naval Security Group Activity Winter Harbor, ME 04693
			Public Works Officer U. S. Naval Facility FPO New York 09552
LCDR David A. Cacchione, USN Office of Naval Research, BROFF 495 Summer Street Boston, MA 02210			Public Works Department Box 400 Naval Submarine Base, New London Groton, CT 06340
			Staff Civil Engineer U. S. Naval Air Station Box 35-D FPO New York 09593
Commanding Officer (Code 200) Navy Public Works Center Naval Base Newport, RI 02840			LCDR T. A. Long, Jr., CEC, USN Naval Submarine Base, New London Groton, CT 06340
			RDT&E Liaison Officer Code 102 Northern Division Naval Facilities Engineering Command Philadelphia, PA 19112
President Naval War College Code 22 Newport, RI 02840			Commanding General U. S. Army Electronics Command Attn AMSEL-GG-TD Fort Monmouth, NJ 07703
			Public Works Officer Naval Facility Lewes, DE 19958
Mr. S. Milligan SB 322 Naval Underwater Systems Center Newport, RI 02844			Engineering Director Code 092 Naval Ammunition Depot, Earle Colts Neck, NJ 07722
			Mr. R. B. Allnutt Code 1706 Naval Ship Research & Dev. Center Bethesda, MD 20034
Commander 21st Naval Construction Regiment Davisville, RI 02854			Plastics Technical Evaluation Center SMUPA-VP3 Picatinny Arsenal Dover, NJ 07801
			Mr. M. A. Krenzke Code 172 - Submarine Division Naval Ship Research & Dev. Center Bethesda, MD 20034
Commanding Officer CBC Technical Library Naval Construction Battalion Center Davisville, RI 02854 (2 copies)			Commanding Officer Amphibious Construction Battalion TWO FPO New York 09501
			William F. Gerhold National Bureau of Standards Corrosion Section Washington, DC 20234
Library U. S. Army Cold Regions Research & Eng. Lab. P. O. Box 282 Hanover, NH 03755			LT Ronald A. Milner, CEC, USN U. S. Naval Station Box 9 FPO New York 09540
			A. Maillar Maritime Administration Office of Ship Construction Washington, DC 20235

* All addressees receive one copy unless otherwise indicated.

Chief of Engineers U. S. Army DAEN-MCE-D Washington, DC 20314	Commandant (M-2/USP/83) U. S. Coast Guard 400 SW 7th Street Washington, DC 20590	LCDR G. E. Shank, CEC, USN Office of Naval Research Ocean Technology Program 800 North Quincy Street Arlington, VA 22217
Benj. R. Petrie, Jr. Op-987 T8; Staff, Director RDT&E Room 4B514, Pentagon Washington, DC 20350	Commander Naval Ship Engineering Center Code 6136 Prince Georges Center Hyattsville, MD 20782	Dr Nicholas Perrone Code 439 Office of Naval Research 800 North Quincy Street Arlington, VA 22217
ENS James F. Morrow, CEC, USN Office of Comptroller of the Navy Navy Department Washington, DC 20350	Commander Naval Ship Engineering Center Code 6162 Prince Georges Center Hyattsville, MD 20782	Dr Alexander Malahoff Code 483 Office of Naval Research 800 North Quincy Street Arlington, VA 22217
Commander Naval Supply Systems Command Headquarters SUP 0423 Washington, DC 20360	Technical Library Naval Ship Engineering Center 622 Center Bldg Prince Georges Center Hyattsville, MD 20782	LCDR J.H. Osborn, CEC, USN Chief of Naval Material (MAT 03414) c/o Oceanographer of the Navy 200 Stovall Street Alexandria, VA 22332
Technical Library, Ships 2052 Naval Ship Systems Command National Center No. 3 Washington, DC 20362	Mr. John B. Alfors Naval Ship Engineering Center Code 6101E Prince Georges Center Hyattsville, MD 20782	Oceanographer of the Navy Attn: Code N712 200 Stovall Street Alexandria, VA 22332
Commander Naval Ship Systems Command Room 00C Washington, DC 20362	Chief, Marine & Earth Sciences Library National Oceanic & Atmospheric Admin. Dept of Commerce Rockville, MD 20852	CAPT Pharo A. Phelps, CEC, USN Naval Facilities Engineering Command 200 Stovall Street Alexandria, VA 22332
Chief Bureau of Medicine & Surgery Research Department Navy Department Washington, DC 20372	M. E. Ringenbach Engineering Development Lab (C61) National Oceanic & Atmospheric Admin. National Ocean Survey Rockville, MD 20852	Dr. Michael Yachnis Code 04E Naval Facilities Engineering Command 200 Stovall Street Alexandria, VA 22332
U. S. Naval Oceanographic Office Library - Code 3600 Washington, DC 20373	Mr. H. A. Perry Naval Ordnance Laboratory, White Oak Silver Spring, MD 20910	CDR G.H. Gans, Jr., CEC, USN Code 042 Naval Facilities Engineering Command 200 Stovall Street Alexandria, VA 22332
John DePalma U. S. Naval Oceanographic Office Code 9233 Washington, DC 20373	LCDR Robert D. Smart, CEC, USN Naval System Engineering Dept U. S. Naval Academy Annapolis, MD 21402	Commander Code 0436B Naval Facilities Engineering Command 200 Stovall Street Alexandria, VA 22332
Director Code 2627 Naval Research Laboratory Washington, DC 20375	Director Division of Engineering & Weapons U. S. Naval Academy Annapolis, MD 21402	CDR Walter J. Eager, CEC, USN Code PC-2 Naval Facilities Engineering Command 200 Stovall Street Alexandria, VA 22332
Mr. J. P. Walsh Naval Research Laboratory Code 8400 Washington, DC 20375	Dr Neil T. Monney Naval Systems Engineering Dept U. S. Naval Academy Annapolis, MD 21402	Mr. C.R. Odden Code PC-2 Naval Facilities Engineering Command 200 Stovall Street Alexandria, VA 22332
Mr. J. J. Gennari Naval Research Laboratory Code 8410 Washington, DC 20375	Mr. D. H. Kallas Annapolis Laboratory Naval Ship Research & Dev. Center Annapolis, MD 21402	Commanding Officer Navy Public Works Center Norfolk, VA 23511
Director of Navy Laboratories Room 300, Crystal Plaza Bldg 5 Department of the Navy Washington, DC 20376	Library, Code 5642 Annapolis Laboratory Naval Ship Research & Dev. Center Annapolis, MD 21402	RDT&E Liaison Officer Code 09P2 Atlantic Division Naval Facilities Engineering Command Norfolk, VA 23511 (2 copies)
Commanding Officer Chesapeake Division - Code 03 Naval Facilities Engineering Command Washington Navy Yard Washington, DC 20390	Commanding Officer U. S. Army Mobility Equip. R&D Center Attn SMEFB-HPC (Mr. Cevasco) Fort Belvoir, VA 22060	Staff Civil Engineer Commander Service Force U. S. Atlantic Fleet Norfolk, VA 23511
CDR L. K. Donovan, CEC, USN Chesapeake Division Naval Facilities Engineering Command Washington Navy Yard Washington, DC 20390	U.S. Army Coastal Eng. Research Center Kinaman Building Fort Belvoir, VA 22060	Director Amphibious Warfare Board Naval Amphibious Base, Little Creek Norfolk, VA 23521
Commandant Naval District Washington Public Works Department-Code 412 Washington, DC 20390	U.S. Army Coastal Eng. Research Center R.A. Jachowski Kingman Building Fort Belvoir, VA 22060	Commandant Logistics Management Center Attn DLSIE Fort Lee, VA 23801
Naval Security Engineering Facility Technical Library 3801 Nebraska Avenue, NW Washington, DC 20390	Facilities Officer Code 108 Office of Naval Research 800 North Quincy Street Arlington, VA 22217	Public Works Officer Naval Hospital Camp Lejeune, NC 28542

RDT&E Liaison Officer Southern Division - Code 90 Naval Facilities Engineering Command P. O. Box 10068 Charleston, SC 29411	Technical Library Code 1311 Naval Undersea Center San Diego, CA 92132	Commanding Officer Western Division - Code 04 Naval Facilities Engineering Command P. O. Box 727 San Bruno, CA 94066
LCDR G. W. Callender, Jr., CEC, USN NROTC Unit Georgia Institute of Technology Atlanta, GA 30332	Director San Diego Branch Western Division Naval Facilities Engineering Command San Diego, CA 92132	Commanding Officer Western Division - Code 04B Naval Facilities Engineering Command P. O. Box 727 San Bruno, CA 94066
Public Works Officer Naval Coastal Systems Laboratory Panama City, FL 32401	Public Works Officer Code 75 Naval Undersea Center San Diego CA 92132	Commanding Officer Western Division - Code 05 Naval Facilities Engineering Command P. O. Box 727 San Bruno, CA 94066
Mr. R. E. Elliott Code 710 Naval Coastal Systems Laboratory Panama City, FL 32401	Public Works Officer Naval Air Station North Island San Diego, CA 92135	Commanding Officer Western Division - Code 20 Naval Facilities Engineering Command P. O. Box 727 San Bruno, CA 94066
Library Branch Army Eng. Waterways Experiment Station Vicksburg, MS 39180	Staff Civil Engineer Naval Station San Diego, CA 92136	Public Works Officer Naval Station Treasure Island San Francisco, CA 94130
Army Construction Eng. Research Lab. ATTN: Library P.O. Box 4005 Champaign, IL 61820	Commanding Officer Navy Public Works Center Naval Base San Diego, CA 92136	Asst. Resident OIC of Construction Bldg 506 Hunters Point Naval Shipyard San Francisco, CA 94135
Commanding Officer - Eng. Div. MRD - Corps of Engineers Department of the Army P. O. Box 103, Downtown Station Omaha, NE 68101	Commanding Officer Naval Missile Center Code 5632.2, Technical Library Point Mugu, CA 93042	Public Works Department (183) Naval Air Station Alameda, CA 94501
Public Works Officer Naval Air Station, New Orleans Belle Chasse, LA 70037	Office of Patent Counsel Code PC (Box 40) Naval Missile Center Point Mugu, CA 93042	Supervisor of Salvage West Coast Representative 4300 Eastshore Highway Emeryville, CA 94608
Public Works Officer Naval Ammunition Depot McAlester, OK 74501	Librarian, Code 9215 Construction Equipment Department Naval Construction Battalion Center Port Hueneme, CA 93043	Director, Engineering Division Officer in Charge of Construction Naval Facilities Engineering Command Contracts, Southwest Pacific APO San Francisco 96528
LT H. S. Stevenson, CEC, USN Texas A & M University 2304 Truman Street Bryan, TX 77801	Commanding Officer Code 155 Naval Construction Battalion Center Port Hueneme, CA 93043	Headquarters Kwajalein Missile Range Box 26, Attn: SSC-RKL-C APO San Francisco 96555
Dr. Arthur R. Laufer Office of Naval Research, BROFF 1030 East Green Street Pasadena, CA 91106	Technical Library - Code C35 Naval School Civil Engineer Corps Officers Bldg 44 Port Hueneme, CA 93043	Commanding Officer Mobile Construction Battalion TEN FPO San Francisco 96601
Officer in Charge Pasadena Lab. - Naval Undersea Center Attn: Technical Library 3202 E. Foothill Blvd Pasadena, CA 91107	Commander 31st Naval Construction Regiment Naval Construction Battalion Center Port Hueneme, CA 93043 (2 copies)	Operations Officer Naval Construction Battalions U. S. Pacific Fleet FPO San Francisco 96610
Public Works Officer Marine Corps Base Camp Pendleton, CA 92055	Commander (Code 753) Technical Library Naval Weapons Center China Lake, CA 93555	Commander Pacific Division Naval Facilities Engineering Command FPO San Francisco 96610
Mr. H. R. Talkington Code 65 Naval Undersea Center San Diego, CA 92132	Superintendent Attn: Library (Code 2124) Naval Postgraduate School Monterey, CA 93940	RDT&E Liaison Officer Pacific Division - Code 403 Naval Facilities Engineering Command FPO San Francisco 96610
Dr J. D. Stachiw Code 6505 Naval Undersea Center San Diego, CA 92132	Dr Edward B. Thornton Department of Oceanography Naval Postgraduate School Monterey, CA 93940	Mr. T. M. Ishibashi Navy Public Works Center Engineering Department - Code 200 FPO San Francisco 96610
Mr. R. E. Jones Code 65402 Naval Undersea Center San Diego, CA 92132	Commanding Officer Western Division - Code 09PA Naval Facilities Engineering Command P. O. Box 727 San Bruno, CA 94066	Public Works Officer U. S. Naval Station Box 15 FPO San Francisco 96614

Mr. D. K. Moore
Hawaii Laboratory
Naval Undersea Center
FPO San Francisco 96615

Officer in Charge of Construction
Naval Facilities Engineering Command
Contracts, Marianas
FPO San Francisco 96630

LT G.D. Cullison, CEC, USN
771 Murray Dr.
Honolulu, HI 96818

Engineering Library, Code 202.5
Puget Sound Naval Shipyard
Bremerton, WA 98314

Commanding Officer
U.S. Navy Public Works Center
Box 13
FPO Seattle 98762

Commanding Officer
U.S. Naval Air Facility
Box 15
FPO Seattle 98767

Colleges, etc

Prof. W. E. Heronemus
Civil Engineering Dept
University of Massachusetts
Amherst, MA 01002

MIT Libraries
Technical Reports - Room 14 E-210
Massachusetts Institute of Technology
Cambridge, MA 02139

LCDR James W. Eckert, CEC, USN
NROTC/NAU
Massachusetts, NA 02139

Robert V. Whitman
Room 1-253
Massachusetts Institute of Technology
Cambridge, MA 02139

Mrs. A. P. Richards
Biological Sciences
William F. Clapp Labs - Battelle
Washington Street
Duxbury, MA 02332

Document Library L0-206
Woods Hole Oceanographic Institution
Woods Hole, MA 02543

Pell Marine Science Library
University of Rhode Island
Narragansett Bay Campus
Narragansett, RI 02882

Prof. R. W. Corell
Mechanical Engineering Dept.
Kingsbury Hall
University of New Hampshire
Durham, NH 03824

Kline Science Library
Kline Biology Tower, Room C-8
Yale University
New Haven, CT 06520

M. Schupack
Schupack Associates
300 Broad Street
Stamford, CT 06901

Mr. Willard J. Pierson, Jr.
University Institute of Oceanography
c/o The Bronx Community College
West 181st Street and University Ave.
Bronx, NY 10453

Reprint Custodian
Dept. of Nautical Science
U. S. Merchant Marine Academy
Kings Point, NY 11024

Dept of Civil Engineering
State University of New York
At Buffalo
Buffalo, NY 14214

Mr. R. F. Snyder
Ordnance Research Laboratory
Pennsylvania State University
State College, PA 16801

Mr. William H. Gotolski
Pennsylvania State University
212 Sackett Bldg
University Park, PA 16802

Professor Adrian F. Richards
Marine Geotechnical Laboratory
Lehigh University
Bethlehem, PA 18015

Associate Librarian
Mar Science & Engineering Library
Lehigh University
15 E. Packer Avenue
Bethlehem, PA 18015

Dr Hsuan Yeh
Towne School of Civil & Mechanical Eng.
University of Pennsylvania
Philadelphia, PA 19104

Professor E. Chesson
132 DuPont Hall
Newark, DE 19711

Professor Raymond R. Fox
Nuclear Defense Design Center
School of Engineering & Applied Science
The George Washington University
Washington, DC 20006

T. W. Mermel
4540 43rd Street, NW
Washington, DC 20016

Library of Congress
Science & Technology Division
Washington, DC 20540

Research Library
Chesapeake Bay Institute
The John Hopkins University
Macaulay Hall
Baltimore, MD 21218

W. F. Searle, Jr.
National Academy of Engineering
808 Timber Branch Parkway
Alexandria, VA 22302

Public Documents Department
Wm. R. Perkins Library
Duke University
Durham, NC 27706

Dr Aleksandar S. Vesic
Department of Civil Engineering
Duke University
Durham, NC 27706

Dr Bruce Muga
Dept of Civil Engineering
Duke University
Durham, NC 27706

Dr Wm F. Brumund
School of Civil Engineering
Georgia Institute of Technology
Atlanta, GA 30332

Professor J. P. Hartman
Dept of Civil & Environ. Sciences
Florida Technological University
Orlando, FL 32816

Dr Charles E. Lane
Institute of Marine Science
University of Miami
Coral Gables, FL 33146

Dr R. F. McAllister
Professor of Oceanography
Florida Atlantic University
Boca Raton, FL 33432

C. R. Stephan
Florida Atlantic University
Department of Oceanography
Boca Raton, FL 33432

Lorenz G. Straub Memorial Library
St Anthony Falls Hydraulic Laboratory
Mississippi River at 3rd Ave, SE
Minneapolis, MN 55414

Dr R. C. Jordan
Dept of Mechanical Engineering
University of Minnesota
Minneapolis, MN 55455

Library
Portland Cement Association
Research & Development Laboratories
5420 Old Orchard Road
Skokie, IL 60076

Dr N. M. Newmark
1114 Civil Engineering Bldg
University of Illinois
Urbana, IL 61801

Professor W. J. Hall
1108 Civil Engineering Bldg
University of Illinois
Urbana, IL 61801

Dr M. T. Davison
2217 Civil Engineering Bldg
University of Illinois
Urbana, IL 61801

Metz Reference Room
Civil Engineering Dept
8106 Civil Engineering Bldg
University of Illinois
Urbana, IL 61801

Acquisition Dept - Serials Section
University of Nebraska Libraries
Lincoln, NE 68508

Robert D. Tent Undersea Services Division Fluor Ocean Services Inc P. O. Drawer 310 Houma, LA 70360	Oceanic Library & Info. Center P. O. Box 2369 La Jolla, CA 92037	Dr S. R. Murphy University of Washington Seattle, WA 98195
Department of Oceanography Texas A & M University College Station, TX 77843	Dr John F. Peel Brahtz P. O. Box 825 La Jolla, CA 92037	Information Officer United Kingdom Scientific Mission British Embassy 3100 Massachusetts Ave, NW Washington, DC
Civil Engineering Dept Texas A & M University College Station, TX 77843	Mr. F. Simpson Lockheed Ocean Laboratory 3380 No. Harbor Blvd San Diego, CA 92101	Mrs. Ragna Adolfsson, Librarian Cement-och Betonginstitutet Fack 100 44 Stockholm 70 Sweden
R. C. Dehart Southwest Research Institute 8500 Culebra Road San Antonio, TX 78228	Dr F. N. Spiess Marine Physical Laboratory of the Scripps Institution of Oceanography University of California San Diego, CA 92152	Literature Exchange Cement and Concrete Association Wexham Springs SLOUGH SL3 6PL Bucks, England
Director Institute of Marine Science The University of Texas Port Aransas, TX 78373	Dr Victor C. Anderson Marine Physical Laboratory of the Scripps Institution of Oceanography University of California San Diego, CA 92152	
Professor M. M. Ayoub Dept of IE Texas Technological University Lubbock, TX 79409	J. Padilla 866 Concord Ave Ventura, CA 93003	Additions
Dr Bernard C. Abbott Allan Hancock Foundation University of Southern California Los Angeles, CA 90007	Manager Ocean Systems, MVJG Lockheed Missiles & Space Co P. O. Box 504 Sunnyvale, CA 94088	Mr. Austin Kovacs U.S. Army Cold Regions Research & Eng. Lab. P. O. Box 282 Hanover, NH 03755
Director Catalina Marine Science Center University of Southern California Los Angeles, CA 90007	Engineering Library Stanford University Libraries Stanford, CA 94305	Mr. John Quirk Code 710 Naval Coastal Systems Lab. Panama City, FL 32401
Aerospace Corporation Acquisitions Group P. O. Box 92957 Los Angeles, CA 90009	Mr. Richard G. Luthy 615 Madison Street Albany, CA 94706	Public Works Dept. Puget Sound Naval Shipyard Bremerton, WA 98314
Dr Young C. Kim Dept of Civil Engineering Calif. State University, Los Angeles Los Angeles, CA 90032	Dept of Naval Architecture College of Engineering University of California Berkeley, CA 94720	Mr. John R. Saroyan 1320 Carl Avenue Vallejo, CA 94590
TRW Systems Attn P. I. Dai R1/2178 1 Space Park Redondo Beach, CA 90278	Engineering Library University of California Berkeley, CA 94720	Mr. Joseph McCartney (Code 608) Naval Undersea Center San Diego, CA 92132
Mr. C. C. Mow The Rand Corporation 1700 Main Street Santa Monica, CA 90401	Michael A. Taylor Civil Engineering Dept College of Engineering University of California, Davis Davis, CA 95616	Commander Naval Ship Engineering Center Code 6157 E Prince George's Center Hyattsville, MS 20782
Dr. Armas Laupa The Rand Corporation 1700 Main Street Santa Monica, CA 90406	Director Calif. Dept of Navigation & Ocean Dev. 1416 9th Street Sacramento, CA 95814	Commander Naval Ship Systems Command Code 03424 Washington, DC 20362
Robert Q. Palmer P.O. Box 7707 Long Beach, CA 90807	Assoc. Professor R. A. Grace University of Hawaii Honolulu, HI 96822	Mr. Richard T. Weaver Crouse-Hinds Company Wolf & 7th North Street Syracuse, NY 13201
Dr C. V. Chelapati Calif. State University, Long Beach Long Beach, CA 90840	LT G. D. Cullison, CEC, USN 771 Murray Dr. Honolulu, HI 96818	Mr. Joe Clerici Code 280.08 Mare Island Naval Shipyard Vallejo, CA 94592
Keck Reference Room (107-78) 136 W. M. Keck Laboratory Calif. Institute of Technology Pasadena, CA 91109	School of Oceanography Oregon State University Corvallis, OR 97331	

<p>Civil Engineering Laboratory HIGH-POWER ELECTROMECHANICAL CABLE CONNECTORS FOR DEEP OCEAN APPLICATIONS (Final), by J. F. McCartney and J. V. Wilson TR-806</p> <p>31 p. illus Apr 1974 Unclassified</p> <p>1. Cable connectors 2. Underwater connectors</p> <p>I. 3.1540-1</p> <p>In support of Navy underwater construction requirements, the Naval Civil Engineering Laboratory has developed prototype high-power electromechanical connectors for use with deep-ocean cable systems and structures. There are two basic connector configurations: one for mating underwater (wet) and one for mating in air (dry). Both are designed for 360 kw, 60 Hertz, 4,160/2,400 VAC power at depths to 6,000 feet, with a mechanical breaking strength of 50,000 pounds. The wet connector is capable of repeated underwater mating by divers, remotely operated actuators, or submersibles with manipulators. Increased performance in depth, strength, or power would require a simple extension of the design, although any significant increase in transmission voltage levels would require further development. These connectors were evaluated in a series of pressure-vessel and open-sea tests to depths of 6,000 feet. The final configuration performed with no electrical or mechanical degradation after 33 matings at depth. Sustained immersion and power tests for one year at 600 feet and in the tidal zone confirmed the endurance of the designs. This development is the first demonstration of a capability for underwater mating of major electrical/mechanical components of seafloor structures.</p>	<p>Civil Engineering Laboratory HIGH-POWER ELECTROMECHANICAL CABLE CONNECTORS FOR DEEP OCEAN APPLICATIONS (Final), by J. F. McCartney and J. V. Wilson TR-806</p> <p>31 p. illus Apr 1974 Unclassified</p> <p>1. Cable connectors 2. Underwater connectors</p> <p>I. 3.1540-1</p> <p>In support of Navy underwater construction requirements, the Naval Civil Engineering Laboratory has developed prototype high-power electromechanical connectors for use with deep-ocean cable systems and structures. There are two basic connector configurations: one for mating underwater (wet) and one for mating in air (dry). Both are designed for 360 kw, 60 Hertz, 4,160/2,400 VAC power at depths to 6,000 feet, with a mechanical breaking strength of 50,000 pounds. The wet connector is capable of repeated underwater mating by divers, remotely operated actuators, or submersibles with manipulators. Increased performance in depth, strength, or power would require a simple extension of the design, although any significant increase in transmission voltage levels would require further development. These connectors were evaluated in a series of pressure-vessel and open-sea tests to depths of 6,000 feet. The final configuration performed with no electrical or mechanical degradation after 33 matings at depth. Sustained immersion and power tests for one year at 600 feet and in the tidal zone confirmed the endurance of the designs. This development is the first demonstration of a capability for underwater mating of major electrical/mechanical components of seafloor structures.</p>
<p>Civil Engineering Laboratory HIGH-POWER ELECTROMECHANICAL CABLE CONNECTORS FOR DEEP OCEAN APPLICATIONS (Final), by J. F. McCartney and J. V. Wilson TR-806</p> <p>31 p. illus Apr 1974 Unclassified</p> <p>1. Cable connectors 2. Underwater connectors</p> <p>I. 3.1540-1</p> <p>In support of Navy underwater construction requirements, the Naval Civil Engineering Laboratory has developed prototype high-power electromechanical connectors for use with deep-ocean cable systems and structures. There are two basic connector configurations: one for mating underwater (wet) and one for mating in air (dry). Both are designed for 360 kw, 60 Hertz, 4,160/2,400 VAC power at depths to 6,000 feet, with a mechanical breaking strength of 50,000 pounds. The wet connector is capable of repeated underwater mating by divers, remotely operated actuators, or submersibles with manipulators. Increased performance in depth, strength, or power would require a simple extension of the design, although any significant increase in transmission voltage levels would require further development. These connectors were evaluated in a series of pressure-vessel and open-sea tests to depths of 6,000 feet. The final configuration performed with no electrical or mechanical degradation after 33 matings at depths. Sustained immersion and power tests for one year at 600 feet and in the tidal zone confirmed the endurance of the designs. This development is the first demonstration of a capability for underwater mating of major electrical/mechanical components of seafloor structures.</p>	<p>Civil Engineering Laboratory HIGH-POWER ELECTROMECHANICAL CABLE CONNECTORS FOR DEEP OCEAN APPLICATIONS (Final), by J. F. McCartney and J. V. Wilson TR-806</p> <p>31 p. illus Apr 1974 Unclassified</p> <p>1. Cable connectors 2. Underwater connectors</p> <p>I. 3.1540-1</p> <p>In support of Navy underwater construction requirements, the Naval Civil Engineering Laboratory has developed prototype high-power electromechanical connectors for use with deep-ocean cable systems and structures. There are two basic connector configurations: one for mating underwater (wet) and one for mating in air (dry). Both are designed for 360 kw, 60 Hertz, 4,160/2,400 VAC power at depths to 6,000 feet, with a mechanical breaking strength of 50,000 pounds. The wet connector is capable of repeated underwater mating by divers, remotely operated actuators, or submersibles with manipulators. Increased performance in depth, strength, or power would require a simple extension of the design, although any significant increase in transmission voltage levels would require further development. These connectors were evaluated in a series of pressure-vessel and open-sea tests to depths of 6,000 feet. The final configuration performed with no electrical or mechanical degradation after 33 matings at depths. Sustained immersion and power tests for one year at 600 feet and in the tidal zone confirmed the endurance of the designs. This development is the first demonstration of a capability for underwater mating of major electrical/mechanical components of seafloor structures.</p>

<p>Civil Engineering Laboratory HIGH-POWER ELECTROMECHANICAL CABLE CONNECTORS FOR DEEP OCEAN APPLICATIONS (Final), by J. F. McCartney and J. V. Wilson</p> <p>TR-806 31 p. illus Apr 1974 Unclassified</p> <p>1. Cable connectors 2. Underwater connectors I. 3.1540-1</p> <p>In support of Navy underwater construction requirements, the Naval Civil Engineering Laboratory has developed prototype high-power electromechanical connectors for use with deep-ocean cable systems and structures. There are two basic connector configurations: one for mating underwater (wet) and one for mating in air (dry). Both are designed for 360 kw, 60 Hertz, 4,160/2,400 VAC power at depths to 6,000 feet, with a mechanical breaking strength of 50,000 pounds. The wet connector is capable of repeated underwater mating by divers, remotely operated actuators, or submersibles with manipulators. Increased performance in depth, strength, or power would require a simple extension of the design, although any significant increase in transmission voltage levels would require further development. These connectors were evaluated in a series of pressure-vessel and open-sea tests to depths of 6,000 feet. The final configuration performed with no electrical or mechanical degradation after 33 matings at depth. Sustained immersion and power tests for one year at 600 feet and in the tidal zone confirmed the endurance of the designs. This development is the first demonstration of a capability for underwater mating of major electrical/mechanical components of seafloor structures.</p>	<p>Civil Engineering Laboratory HIGH-POWER ELECTROMECHANICAL CABLE CONNECTORS FOR DEEP OCEAN APPLICATIONS (Final), by J. F. McCartney and J. V. Wilson</p> <p>TR-806 31 p. illus Apr 1974 Unclassified</p> <p>1. Cable connectors 2. Underwater connectors I. 3.1540-1</p> <p>In support of Navy underwater construction requirements, the Naval Civil Engineering Laboratory has developed prototype high-power electromechanical connectors for use with deep-ocean cable systems and structures. There are two basic connector configurations: one for mating underwater (wet) and one for mating in air (dry). Both are designed for 360 kw, 60 Hertz, 4,160/2,400 VAC power at depths to 6,000 feet, with a mechanical breaking strength of 50,000 pounds. The wet connector is capable of repeated underwater mating by divers, remotely operated actuators, or submersibles with manipulators. Increased performance in depth, strength, or power would require a simple extension of the design, although any significant increase in transmission voltage levels would require further development. These connectors were evaluated in a series of pressure-vessel and open-sea tests to depths of 6,000 feet. The final configuration performed with no electrical or mechanical degradation after 33 matings at depth. Sustained immersion and power tests for one year at 600 feet and in the tidal zone confirmed the endurance of the designs. This development is the first demonstration of a capability for underwater mating of major electrical/mechanical components of seafloor structures.</p>
<p>Civil Engineering Laboratory HIGH-POWER ELECTROMECHANICAL CABLE CONNECTORS FOR DEEP OCEAN APPLICATIONS (Final), by J. F. McCartney and J. V. Wilson</p> <p>TR-806 31 p. illus Apr 1974 Unclassified</p> <p>1. Cable connectors 2. Underwater connectors I. 3.1540-1</p> <p>In support of Navy underwater construction requirements, the Naval Civil Engineering Laboratory has developed prototype high-power electromechanical connectors for use with deep-ocean cable systems and structures. There are two basic connector configurations: one for mating underwater (wet) and one for mating in air (dry). Both are designed for 360 kw, 60 Hertz, 4,160/2,400 VAC power at depths to 6,000 feet, with a mechanical breaking strength of 50,000 pounds. The wet connector is capable of repeated underwater mating by divers, remotely operated actuators, or submersibles with manipulators. Increased performance in depth, strength, or power would require a simple extension of the design, although any significant increase in transmission voltage levels would require further development. These connectors were evaluated in a series of pressure-vessel and open-sea tests to depths of 6,000 feet. The final configuration performed with no electrical or mechanical degradation after 33 matings at depths. Sustained immersion and power tests for one year at 600 feet and in the tidal zone confirmed the endurance of the designs. This development is the first demonstration of a capability for underwater mating of major electrical/mechanical components of seafloor structures.</p>	<p>Civil Engineering Laboratory HIGH-POWER ELECTROMECHANICAL CABLE CONNECTORS FOR DEEP OCEAN APPLICATIONS (Final), by J. F. McCartney and J. V. Wilson</p> <p>TR-806 31 p. illus Apr 1974 Unclassified</p> <p>1. Cable connectors 2. Underwater connectors I. 3.1540-1</p> <p>In support of Navy underwater construction requirements, the Naval Civil Engineering Laboratory has developed prototype high-power electromechanical connectors for use with deep-ocean cable systems and structures. There are two basic connector configurations: one for mating underwater (wet) and one for mating in air (dry). Both are designed for 360 kw, 60 Hertz, 4,160/2,400 VAC power at depths to 6,000 feet, with a mechanical breaking strength of 50,000 pounds. The wet connector is capable of repeated underwater mating by divers, remotely operated actuators, or submersibles with manipulators. Increased performance in depth, strength, or power would require a simple extension of the design, although any significant increase in transmission voltage levels would require further development. These connectors were evaluated in a series of pressure-vessel and open-sea tests to depths of 6,000 feet. The final configuration performed with no electrical or mechanical degradation after 33 matings at depths. Sustained immersion and power tests for one year at 600 feet and in the tidal zone confirmed the endurance of the designs. This development is the first demonstration of a capability for underwater mating of major electrical/mechanical components of seafloor structures.</p>

